



---

## **An Introduction to Geometrics for Roads and Streets**

By:

*J. Paul Guyer, P.E., R.A.*

PDHLibrary Course No 0010087  
3 PDH HOURS

---



**J. Paul Guyer, P.E., R.A.  
Editor**

Paul Guyer is a registered civil engineer, mechanical engineer, fire protection engineer and architect with 35 years of experience designing buildings and related infrastructure. For an additional 9 years he was a principal staff advisor to the California Legislature on capital outlay and infrastructure issues. He is a graduate of Stanford University and has held numerous national, state and local offices with the American Society of Civil Engineers, Architectural Engineering Institute and National Society of Professional Engineers. He is a Fellow of ASCE and AEI.

# An Introduction to Geometrics for Roads and Streets

J. Paul Guyer, P.E., R.A.

Editor



The Clubhouse Press  
El Macero, California



## **CONTENTS**

- 1. GENERAL**
- 2. DESIGN CONSIDERATIONS**
- 3. GEOMETRIC DESIGN FOR ROADS AND STREETS**

(This publication is adapted from the *Unified Facilities Criteria* of the United States government which are in the public domain, have been authorized for unlimited distribution, and are not copyrighted.)

(Figures, tables and formulas in this publication may at times be a little difficult to read, but they are the best available. **DO NOT PURCHASE THIS PUBLICATION IF THIS LIMITATION IS UNACCEPTABLE TO YOU.**)





## **1. GENERAL**

**1.1 PURPOSE AND SCOPE.** This publication discusses the geometric design criteria for roads and streets. It sets forth the approaches and traffic flow criteria for guidance in determining types and configurations best suited for construction.

**1.2 DEFINITIONS OF PERTINENT TERMS.** The definitions of terms relative to highway design are given in lists of definitions presented in the manuals of AASHTO and as a part of specific procedures described below.

**1.2.1 ACCESS HIGHWAYS.** An access highway is an existing or proposed public highway which is needed to provide highway transportation services from a public or private installation to suitable transportation facilities.

**1.2.2 INSTALLATION HIGHWAYS.** Installation highways include all roads and streets within the site limits of a public or private installation.

**1.2.3 HIGHWAY PLANNING.** The planning of the general road system is an integral part of public or private installation master planning. Major objectives of master planning are the grouping of related functions reasonably close to each other and the interrelating of land-use areas for maximum efficiency, speed of construction, and economy of operation. The connecting road system should be planned in keeping with these objectives to minimize travel and permit the optimum circulation of traffic originating both outside and within the installation. Traffic studies may not be available, so good engineering judgment and assessment of current and/or near future needs must be made to determine traffic requirements. The geometric design of highway facilities should provide for safe, smooth, and convenient traffic movement consistent with time limitations, topographical conditions, and to the extent possible, economical construction. Existing roads and streets at installations can be classified in accordance with requirements presented in tables 1-1 and 1-2. The elements to be given primary

consideration in such classifications are pavement width, shoulder width, degree and length of slopes (grade), and passing sight distance. Values for these elements should be essentially equal to or greater than the minimum requirements for classification assigned. All of the requirements in table 1-1 or 1-2 should be considered, but requirements other than those just listed can be given greater latitude.

**1.4 TRAFFIC.** The volume and composition of the traffic determines the geometric requirements for roads and streets. Type, volume, character, frequency, and composition of traffic at installations are related to size, type, and purpose of the installation. The size, type, and purpose of the installation provide information as to its functional requirements, indicating character and size of vehicles. Types of vehicles, types of terrain, and frequency of use establish the traffic classification in which roads and streets fall. Classification reflecting character of traffic is based upon the characteristics and dimensions of existing vehicles. It is essential that the designer be aware of the vehicular traffic anticipated prior to selection of the type design to use on a particular project.

Design Controls and Elements	Class B Road <sup>a</sup> Two-Lane Road			Class D Road <sup>a</sup> Two-Lane Road			Class E Road <sup>a</sup> Two-Lane Road		
	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous
<u>Design Controls:</u>									
Traffic composition: <sup>1</sup>									
T = 0% ADT <sup>2</sup> DHV <sup>3</sup>	4,000-6,000 600-900	4,000-6,000 600-900	4,000-6,000 600-900	1,000-4,000 150-600	1,000-4,000 150-600	1,000-4,000 150-600	Under 1,000 Under 150	Under 1,000 Under 150	Under 1,000 Under 150
T = 10% ADT <sup>2</sup> DHV <sup>3</sup>	3,600-5,500 650-820	3,000-4,600 360-530	2,400-3,500 360-530	950-3,600 140-550	770-3,000 115-450	600-2,400 90-360	Under 950 Under 140	Under 770 Under 115	Under 600 Under 90
T = 20% ADT <sup>2</sup> DHV <sup>3</sup>	3,300-5,000 500-750	2,500-3,700 360-560	1,600-2,500 240-380	870-3,300 130-500	630-2,500 95-380	400-1,600 60-240	Under 870 Under 130	Under 630 Under 95	Under 400 Under 60
T = 30% ADT <sup>2</sup> DHV <sup>3</sup>	3,000-4,700 450-700	2,000-3,200 310-480	1,200-2,100 180-310	770-3,000 115-450	570-2,100 85-310	330-1,200 50-180	Under 770 Under 115	Under 570 Under 95	Under 330 Under 50
Design speed, mph	70	60	50	55	45	35	55	45	35
Average running speed, mph	49	45	40	43	37	30	43	37	30
<u>Cross-Section Elements:</u>									
<u>Pavements:</u>									
Minimum width of traffic lanes, ft									
With barrier curbs	12	12	12	10	10	10	10	10	10
Without barrier curbs	12	12	12	10	10	10	10	10	10
Minimum distance between barrier curbs, ft	29	29	29	24	24	24	20	20	20
Desirable lateral clearance, to obstructions, ft	6	6	6	4	4	4	2	2	2
Normal cross slope, in./ft	1/8 to 1/4			3/16 to 3/8			1/4 to 1/2		
<u>Curbs:</u> <sup>6</sup>									
Types									

See paragraph 3-2.b

Table 1-1

Geometric Criteria for Classified Roads Within "Open" Areas (Rural Areas)

Design Controls and Elements	Class B Road <sup>a</sup> Two-Lane Road			Class D Road <sup>a</sup> Two-Lane Road			Class E Road <sup>a</sup> Two-Lane Road <sup>b</sup>		
	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous
Offset for barrier curbs	2.5	2.5	2.5	2.0	2.0	2.0	0	0	0
Medians <sup>7</sup>									
Shoulders <sup>8</sup>									
Minimum width, shoulders on roads without barrier curbs, ft	10	8	8	8	6	6	6	6	4
Normal cross slope, in./ft		3/8 to 1/2			1/2 to 3/4			3/4 to 1	
Type			Dustless and stable for all-weather use			Stabilized with select material			Compacted soil
Guardrails, guideposts, and earth slopes							See figure 3-2		
Bridge clearance								See paragraph 3-3e	
Design Elements:									
Sight distance:									
Minimum stopping sight distance, ft	600	475	350	415	310	260	415	310	240
Minimum passing sight distance, ft	2,300	2,000	1,700	1,850	1,500	1,050	1,850	1,500	1,500
Horizontal alignment:									
Horizontal curves, maximum curvature	1°30'	2°00'	3°00'	2°30'	3°30'	6°00'	2°30'	3°30'	6°00'
Desirable maximum Absolute banking									
Where snow and ice are not factors	4°00'	5°30'	8°00'	7°00'	10°30'	18°00'	7°00'	10°30'	18°00'
Where snow and ice are factors	3°00'	4°30'	7°00'	5°45'	9°00'	16°00'	5°45'	9°00'	16°00'
Pavement widening									

Table 1-1 (continued)

Geometric Criteria for Classified Roads Within "Open" Areas (Rural Areas)

Design Controls and Elements	Class B Road <sup>a</sup> Two-Lane Road			Class D Road <sup>a</sup> Two-Lane Road			Class E Road <sup>a</sup> Two-Lane Road		
	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous	Flat	Rolling	Mountainous
<b>Vertical alignment:</b>									
Grade: <sup>10</sup>									
Desirable maximum									
Percent	3								
Critical length, ft <sup>11</sup>	1035								
Absolute maximum for permanent installations									
Percent	5								
Critical length, ft <sup>11</sup>	1000								
Absolute maximum for temporary installations									
Percent	6								
Critical length, ft <sup>11</sup>	825								
Minimum, percent	0.3								
Vertical curves <sup>12</sup>									
K for determining safe length									
Crest vertical curves	240								
Sag vertical curves	140								
Minimum length, ft	210								

- NOTES:**
- 1 The symbol "T," with percentage limitations, represents the proportion of total traffic composed of buses, trucks, and track-laying vehicles; the remainder are light delivery trucks and passenger cars.
  - 2 The DHV is equal to approximately 15 percent of the ADT.
  - 3 These values show the mixed traffic volume which requires the same operational area as that required by traffic composed of light-delivery trucks and passenger cars. These DHV's are based on the indicated percentage of the daily volume and may be overconservative in some instances because the percentages of trucks, track-laying vehicles, etc., during peak hours are generally considerably lower than the average percentage during all hours.
  - 4 The traffic lane widths indicated are for use on roads where the traffic will consist principally of vehicles with maximum overall widths of 8 ft. or less. For determining traffic lane width for excessive-width vehicles, see paragraph 3-1-h.
  - 5 Distance shown is the minimum distance between face of curbs where Class B roads require more than 2-lanes; additional lane widths are to be added to minimum distance between curbs.
  - 6 Generally, curbs will not be provided on roads in open areas. See paragraph 3-2 for exceptions on provision of curbs within open areas at Army installations. The curb offset is measured from the edge of the pavement to the vertical face of the curb on the curb portion of a combined curb and gutter.
  - 7 Where traffic volume requires construction of multilane roads, opposing traffic should be separated by medians. Width and location of medians, median shoulders, and median curbs are discussed in paragraph 3-3-h.
  - 8 There should be a color or textural contrast between pavement and shoulder surface sufficient to clearly define the pavement and shoulders in all types of weather.

Table 1-1 (continued)

Geometric Criteria for Classified Roads within "Open" Areas (Rural Areas)

**NOTES:**

- (Continued)
- 9 Absolute maximum values shown were calculated on the basis of a maximum rate of superelevation of 0.10. Absolute value for horizontal curves will have to be recalculated if a maximum rate of superelevation other than 0.10 is used.
  - 10 See paragraph 3-6.a, for exception to this criteria.
  - 11 The term "critical length" is used to indicate the maximum length of a designated upgrade upon which a loaded truck can operate without an unreasonable reduction in speed. Methods for determination of critical length are discussed in paragraph 3-6.a.(1).
  - 12 The minimum lengths of vertical curves are determined by multiplying "K" times the algebraic difference of grades (in percent).
  - a The DTV is in total vehicles per hour for all lanes in both directions.
  - b For single lane roads use criteria of Class I mountainous.

Table 1-1 (continued)

Geometric Criteria for Classified Roads within "Open" Areas (Rural Areas)

	Class B Street <sup>a</sup> Two-Lane Street		Class D Street <sup>a</sup> Two-Lane Street		Class E Street <sup>b</sup> Two-Lane Street	
	<u>Flat</u>	<u>Rolling</u>	<u>Flat</u>	<u>Rolling</u>	<u>Flat</u>	<u>Rolling</u>
<u>Traffic composition<sup>1</sup></u>						
T = 0%	7,500-10,000 900-1,200	7,500-10,000 900-1,200	2,100-7,500 250-900	2,100-7,500 250-900	Under 2,100 Under 250	Under 2,100 Under 250
T = 10%	6,800-9,100 810-1,090	5,700-7,700 680-920	1,900-6,800 230-810	1,600-5,700 190-680	Under 1,900 Under 230	Under 1,600 Under 190
T = 20%	6,200-8,300 750-1,000	4,600-6,300 550-760	1,800-6,200 220-150	1,300-6,600 160-550	Under 1,000 Under 220	Under 1,300 Under 160
T = 30%	5,800-7,700 700-920	4,200-5,300 500-640	1,600-5,800 190-700	1,100-6,200 130-500	Under 1,600 Under 190	Under 1,100 Under 130
Design speed, mph	50	40	40	30	40	30
Average running speed, mph	36	32	32	25	32	25
<u>Cross-Section Elements:</u>						
<u>Pavements:</u>						
Minimum width of lanes, ft <sup>4</sup>						
With barrier curbs	12	12	11	11	10	10
Traffic <sup>5</sup>	None	None	8	8	6	6
Parking						
Without barrier curbs						
Traffic	12	12	11	11	10	10
Minimum distance between barrier curbs, ft <sup>6</sup>						
With parking lanes <sup>5</sup>	None	None	41	41	36	36
Without parking lanes <sup>7</sup>	29	29	25	25	20	20
Desirable lateral clearance to obstructions, ft	6	6	4	4	2	2
Normal cross slope, in./ft	1/8 to 1/4				3/16 to 3/8	

Table 1-2  
Geometric Criteria for Classified Street Within "Built-up" Areas

<u>Design Controls and Elements</u>	<u>Class B Street<sup>a</sup> Two-Lane Street</u>	<u>Class C Street<sup>a</sup> Two-Lane Street</u>	<u>Class F Street<sup>a</sup> Two-Lane Street</u>
	<u>Flat</u>	<u>Rolling</u>	<u>Flat</u>
<b>Curbs:</b>			
Types			See paragraph 3-2b.
Offset for barrier curbs, ft	2.5	2.5	1.5
Medians <sup>9</sup>			See figure 3-1
Shoulders: <sup>10</sup>			
Minimum width, shoulders on streets without barrier curbs, ft	10	6	8
Normal cross slope, in./ft		3/8 to 1/2	1/2 to 3/4
Type			Dustless and stable for all weather use
Guardrails, guideposts, and earth slopes			See figure 3-2
Bridge clearance			See paragraph 3-3e
<b>Design Elements:</b>			
Sight distance:			
Minimum stopping sight distance, ft	350	275	200
Horizontal alignment:			
Horizontal curves			
Absolute maximum for normal crown section	0°30'	0°45'	1°30'
Absolute maximum for super-elevated section	5°30'	9°15'	17°15'
Pavement widening			See table 3-1 and figure 3-3
Vertical alignment:			
Grade			
Desirable maximum			
Percent Critical length, ft <sup>12</sup>	3 900	550	475
			5 400
			6 200

Table 1-2 (continued)  
 Geometric Criteria for Classified Street Within "Built-up" Areas

Design Controls and Elements	Class B Street <sup>a</sup> Two-Lane Street		Class D Street <sup>b</sup> Two-Lane Street		Class E Street <sup>c</sup> Two-Lane Street	
	Flat	Rolling	Flat	Rolling	Flat	Rolling
<b>Absolute maximum for permanent installations</b>						
Percent	4	5	6	7	7	8
Critical length, ft. <sup>d</sup>	675	200	500	200	450	175
<b>Absolute maximum for temporary installations</b>						
Percent	6	6	7	8	8	9
Critical length, ft. <sup>d</sup>	500	275	450	200	200	150
Minimum, percent		0.3				0.5
<b>Vertical curves<sup>e</sup></b>						
K for determining safe length	80	50	50	38	50	28
Crest vertical curves	70	50	50	35	50	35
Sag vertical curves						
Minimum length, ft.	150	120	120	90	120	90

NOTES: 1 The symbol "T," with percentage limitations, represents the proportion of total traffic composed of buses, trucks, and track-laying vehicles; the remainder are light-delivery trucks and passenger cars.

2 The DHV is equal to approximately 12 percent of the AHT.

3 These values show the mixed traffic volume which requires the same operational area as that required by traffic composed of light-delivery trucks and passenger cars. These DHV's are based on the indicated percentage of the daily volume and may be overconservative in some instances because the percentages of truck, track-laying vehicles, etc., during peak hours are generally considerably lower than the average percentage during all hours.

4 The traffic and parking lane widths indicated are for use on streets where the traffic will consist principally of vehicles with maximum overall widths of 8 ft or less. For determining traffic lane width for use of excessive-width vehicles, see paragraph 3-1-b. Traffic lanes of streets without curbs in warehouse areas should not be less than 12 ft regardless of class. The total width of streets with curbs adjacent to warehouses should not be less than 30 ft between curbs regardless of class. The values given for width of parking lanes is the distance between the outside edge of the adjacent traffic lane and the face of the curb for Type IV curbs. The width of gutter in combined curb and gutter (Types I and III curbs) may be included in the width of parking lane provided the gutter is as strong structurally as the adjoining pavement, otherwise the width of parking lane shown will be the distance between the outside edge of the adjacent traffic lane and the inside edge of the gutter.

5 See paragraph 3-2 for criteria relative to provision of parking facilities.

6 Distance shown is the minimum distance between face of curbs.

7 Where Class E streets are designed with barrier curbs, curb offsets are not required adjacent to traffic lanes.

8 Generally, barrier curbs will be provided on streets in built-up areas. See paragraph 3-2 for exceptions on provision of curbs within built-up areas at Army installations. Types I and IV curbs greater than 6 in. in height and Type III curbs greater than 18 in. in height are considered to be lateral obstructions. The curb offset is measured from the edge of the pavement to the vertical face of the curb or the curb portion of a combined curb and gutter.

9 Where traffic volume requires construction of multilane streets, opposing traffic should lie separated by medians. Width and location of medians, median shoulders, and median curbs are discussed in paragraph 3-3-h. Generally, medians are provided with barrier curbs in built-up areas.

Table 1-2 (continued)

### Geometric Criteria for Classified Street Within "Built-up" Areas

NOTES: (Continued)

- 10 There should be a color or textural contrast between pavement and shoulder surface sufficient to clearly define the pavement and shoulders in all types of weather.
- 11 Absolute maximum values shown were calculated on the basis of a maximum rate of superelevation of 0.02. Superelevation rate of 0.04 or 0.06 may be used on streets in which case the absolute maximum values for horizontal curves will have to be recalculated.
- 12 The term "critical length" is used to indicate the maximum length of a designated upgrade upon which a loaded truck can operate without an unreasonable reduction in speed. Methods for determination of critical length are discussed in paragraph 3-6.a.(1).
- 13 The minimum lengths of vertical curves are determined by multiplying "N" times the algebraic difference of grades (in percent).
- 14 On-street parking will not be provided on new Class B or C streets. Dimension given is applicable only to existing streets.
- The DHV is given in total vehicles per hour for all lanes in both directions.

Table 1-2 (continued)

Geometric Criteria for Classified Street Within "Built-up" Areas

## **2. DESIGN CONSIDERATIONS**

**2.1 GENERAL.** Geometric design deals with the dimensions of the visible features of a facility such as alignment, sight distances, widths, slopes, and grades. Geometric design criteria are set forth in tables 1-1 and 1-2 and discussed in subsequent paragraphs.

### **2.2 ROAD AND STREET TYPES.**

**2.2.1 DESIGNATIONS OF TYPES.** Highways are generally typed according to the number of traffic lanes as single-, two-, and three-lane, and undivided or divided multilane (four or more traffic lanes) highways. When information is available relative to volume and composition of traffic and type of terrain for a proposed highway, the type required can be readily determined by comparing the traffic volume expected on the proposed road or street with the design hourly volume shown in tables 1-1 and 1-2.

**2.2.2 SINGLE-LANE ROADS.** Geometric design criteria for single-lane roads are shown in table 1-1 under "Class E Roads -mountainous." Where shoulders are not sufficiently stable to permit all-weather use and the distance between intersections is greater than 1/2 mile, turnouts will be provided at 1/4-mile intervals for use by occasional passing or meeting vehicles. Single-lane pavements may be provided for fire lanes and approach drives to buildings within built-up areas, in which case the pavement will be at least 12 feet wide in all cases.

### **2.2.3 TWO-LANE ROADS AND STREETS.**

**2.2.3.1 CLASS B, D, AND E ROADS.** The bulk of the roads and streets at many installations are two-lane highways. These include Class B, D, and E roads and Class B, D, and E streets.

**2.2.3.2 CLASS A, C, AND F ROADS.** Road classifications A, C, and F may not be used for some conditions. Class B roads will allow adequate traffic pattern considerations to provide criteria for road design thicknesses commensurate with the life expectancy of the program. The use of four lane roads is to be minimized for mobilization construction. Where four lane roads cannot be avoided, Class B criteria will be used. When the road classifications were reviewed in light of requirements, it was determined that the requirements of Class B roads or Class D roads could be used to satisfy the traffic range of Class C roads. The single lane roads of Class F can readily be designed as minimum Class E roads. By reducing the number of road classifications, the refinement and detail of traffic flow data is greatly reduced without seriously affecting the development of some road systems.

**2.2.4 MULTILANE (FOUR TRAFFIC LANES OR MORE) HIGHWAYS •** The design criteria presented herein for highways are generally applicable to multilane highways also, except that passing sight distance is not required. Where multilane highways are designed for relatively high speeds, opposing traffic should be separated by properly designed medians.

## **2.3 DESIGN CONTROLS.**

**2.3.1 TOPOGRAPHY AND LAND USE.** Tables 1-1 and 1-2 set forth appropriate design standards for roads and streets traversing flat, rolling, or mountainous terrain in built-up or open areas.

**2.3.2 VEHICLE CHARACTERISTICS.** Table 2-1 shows dimensions of design vehicles on which the geometric design criteria presented herein are based. Some of these vehicles are wider than 8.5 feet, which is the maximum width shown in table 2-1 for any of the design vehicles.

**2.3.3 TRAFFIC.** The geometric design criteria presented in tables 1-1 and 1-2 have been developed on the basis of horizontal area requirements for various combinations

of number and kind of vehicles expected in the traffic stream. The general unit for measurement of traffic is average daily traffic (ADT); the basic fundamental unit of measurement of traffic is design hourly volume (DHV).

**2.3.3.1 VOLUME.** Traffic volumes are expressed as ADT and DHV in tables 1-1 and 1-2. The ADT represents the total traffic volume for the year divided by 365. It is a value needed to determine total service and economic justification for highways but is inadequate for geometric design because it does not indicate the significant variation in the traffic during seasons, days, or hours. If a road or street is to be designed so that traffic will be properly served, consideration must be given to the rush-hour periods. The rush hour volume represented as an average daily peak hour is the basis of the DHV. The DHV is to be used for geometric design. Limited studies made of traffic flows at some installations indicate that because of the high frequency with which peak hourly traffic occurs, the average daily peak can be economically and efficiently used as the DHV. The DHV in tables 1-1 and 1-2 are shown as 15 and 12 percent, respectively, of the ADT. These are median values selected for Army installations.

**2.3.3.2 COMPOSITION.** Traffic on installation roads and streets may consist of a combination of passenger cars, light-delivery trucks, single-unit trucks, truck combinations, buses, and other vehicles. Trucks, buses, and other vehicles have more severe operating characteristics, occupy more roadway space, and consequently impose a greater traffic load on highways than do passenger cars and light-delivery trucks. ADT and DHV for various combinations of vehicular traffic are shown in tables 1-1 and 1-2. The larger the proportions of buses, trucks, and some other vehicles present in the traffic stream during the selected design hour, the greater the traffic load and highway capacity required. The DHV of tables 1-1 and 1-2 diminish for each highway class as the percentage of buses, trucks, and tracked vehicles in the traffic stream increase. The tables provide design data for traffic containing 0, 10, 20, and 30 percent buses, trucks, and some other vehicles.

Type	Vehicle Symbol	Wheel Base	Dimensions in Feet			Overall Width	Height	Turning Radius c
			Overhang Front	Rear	Length			
Passenger	P	11	3	5	19	7	—	24
Single-unit truck	SU	20	4	6	30	8.5	13.5	42
Single-unit bus	BUS	25	7	8	40	8.5	13.5	42
Semitrailer combination								
Intermediate	WB40	13 + 27 = 40 <sup>a</sup>	4	6	50	8.5	13.5	40
Large	WB50	20 + 30 = 50 <sup>a</sup>	3	2	55	8.5	13.5	45
Full trailer combination	WB60	9.7 + 20 + 9.4 <sup>b</sup> + 20.9 = 60	2	3	65	8.5	13.5	45

**NOTE:** In designs for normal operations, the largest vehicle representing a significant percentage of the traffic should be used. In designing roads or streets to accommodate truck traffic, one of the semitrailer combinations should be used. A design check should be made to insure that the largest vehicle expected to use the road or street can negotiate all turns, particularly if pavements are curbed.

- a Length of tractor plus length of trailer.
- b Distance between rear wheels of front trailer and front wheels of rear trailer.
- c Minimum turning radius outside front wheel.

Table 2-1  
Design Vehicle Dimensions

## **2.4 SPEED AND CAPACITY INFLUENCE.**

### **2.4.1 SPEED.**

**2.4.1.1 INFLUENCE ON GEOMETRIC DESIGN.** Vehicular speed varies according to the physical characteristics of the vehicle and highway, weather conditioning, volume of traffic, and the type of shoulders and other roadside features. On streets, the speed generally will depend on traffic control devices when weather and traffic conditions are favorable. On roads, the physical features of the roadway usually control speed if other conditions are favorable. Therefore, speed is a positive control for geometric design. Consideration must be given to the selected design speed and average running speed if adequate designs are to be developed.

**2.4.1.2 DESIGN SPEED.** The speed selected for design is the major control in designing physical features of highways. Practically all features of a highway will be affected to some extent by the design speed. Maximum curvature, superelevation, and minimum sight distance are automatically determined by the selected design speed. Other features such as pavement and shoulder width, and lateral clearance to obstructions are not directly affected by design speed but do affect vehicle speed. The design speed should be selected primarily on the basis of terrain characteristics, land use, and economic considerations. The geometric design criteria presented herein are based on the design speeds shown under "Design Controls" in tables 1-1 and 1-2.

**2.4.1.3 AVERAGE RUNNING SPEED.** The average running speeds on which the geometric design criteria are based are shown under "Design Controls" in tables 1-1 and 1-2.

### **2.4.2 CAPACITY.**

**2.4.2.1 CONDITIONS AFFECTING CAPACITY.** The capacity of a road or street will vary with lane width, distance to lateral obstructions, condition and width of shoulders, profile and alignment, and with the composition and speed of traffic. These factors are referred to collectively as prevailing conditions. Those factors depending on physical features of the highway are called prevailing roadway conditions, and those depending on the character of the using traffic are called prevailing traffic conditions. The term capacity in itself has no significance unless the prevailing roadway and traffic conditions are stated.

**2.4.2.2 CAPACITY ANALYSIS.** Capacities under ideal conditions are presented in the TRB Highway Capacity Manual. Uninterrupted flow capacities under ideal traffic and roadway conditions for 2-lane, 2-way, highway, (total for both lanes) and for multilane highway (average per lane for direction of heavier flow), will be 2,000 passenger cars per hour.

**2.4.2.3 CAPACITY FOR UNINTERRUPTED FLOW.** The DHV shown in tables 1-1 and 1-2 are equal to the capacity for uninterrupted flow for each class of road and street on the basis of the geometric design criteria presented. Highway capacity is directly related to the average running speed. Maximum capacity occurs when average running speed is between 30 and 45 mph. Any factors which reduce or increase the average running speed will also reduce capacity. The capacities (DHV) shown in tables 1-1 and 1-2 for Class B roads, and Class B and D streets will be reduced in accordance with the following tabulation in all cases where it is anticipated that the average running speed on a substantial length of a road or street will be appreciably less than 30 mph.

<u>Average Running Speed, mph</u>	<u>Capacity (DHV) in Percentage of Values Shown in Tables 1-1 and 1-2</u>
30	100
25	95
20	87
15	72

### 3. GEOMETRIC DESIGN FOR ROADS AND STREETS

#### 3.1 CROSS-SECTION ELEMENTS.

##### 3.1.1 PAVEMENT.

**3.1.1.1 TYPE SURFACE.** Pavement type is seldom an important factor in geometric design; however, the ability of a pavement surface to retain its shape and dimensions, its cross-section, and the possible effect of pavement surface on driver behavior should be considered in geometric design.

**3.1.1.2 NORMAL CROSS SLOPE.** Selection of proper cross slope depends upon speed-curvature relations, vehicle characteristics, curb requirements, and general weather conditions. Cross slope for sharp curves (superelevation) is discussed in AASHTO GD-2. Cross slope on tangents and flat curves are shown in tables 1-1 and 1-2. Where two or more lanes are inclined in the same direction on Class B roads and streets, each successive lane outward from the crown line should have an increased cross slope. The lane adjacent to the crown line should have the minimum cross slope shown in tables 1-1 and 1-2 and the cross slope of each successive lane should be increased 1/16 in/ft. Where pavements are designed with barrier curbs, it is recommended that a minimum cross slope of 3/16 in/ft be used on Class B roads and streets and that a minimum cross slope of 1/4 in/ft be used on Class D and E roads and streets.

**3.1.2 LANE WIDTH.** The number and width of traffic lanes shown in tables 1-1 and 1-2 are the minimum considered adequate to accommodate the indicated design hourly volume when the traffic is composed principally of wheeled vehicles whose overall widths are 8.5 feet or less. Wider traffic lanes are required when the traffic is composed of a significant percentage of vehicles whose overall widths are greater than 8.5 feet. In general, the lane width will be increased by the excess width of the largest over-sized vehicle (vehicle width minus 8.5 feet to the nearest higher even foot) where such traffic is anticipated.

**3.2 CURBS, COMBINATION CURBS, AND GUTTERS.** Curbs, combination curbs and gutters, and paved gutters with attendant storm drainage facilities will not be considered during a mobilization situation unless they are determined to be absolutely necessary or conditions would allow their construction. The road or street design will account for the "no curb" feature and provide for drainage and erosion control accordingly.

**3.2.1 CURB CONSTRUCTION.** In built-up areas, curbs, combination curbs and gutters, and paved gutters with attendant underground storm drainage systems will be provided when necessary along streets and in open storage areas as required to aid in the collection and disposal of surface runoff including snowmelt, to control erosion, to confine traffic, or as required in the extension of existing similar facilities. In open areas, combination curbs and gutters will not be provided along roads except where necessary on steep grades to control drainage and prevent erosion of shoulders and fill slopes. Where such facilities are required, they should be located outside the edges of traffic lanes and should be either of the mountable type with suitable outlets and attendant drainpipes or paved gutters with shallow channels extending across the road shoulders and down the fill slopes.

**3.2.2 CLASSIFICATION AND TYPES.** Curbs are classified as barrier or mountable according to their intended use. Barrier curbs are designed to prevent or at least discourage vehicles from running off the pavement and therefore have a steeply sloping

face at least 6 inches high. Mountable curbs are designed to allow a vehicle to pass over the curb without damage to the vehicle, and have a flat sloping face 3 to 4 inches high. For construction purposes, curbs are usually designated as "combined curb and gutter" and "integral curb and gutter." For some installations curbs are divided into four types for convenience of reference: type I is a combined gutter section and barrier curb; Type II is a combined gutter section and mountable curb; Type III is a combined gutter section and offset barrier curb; and Type IV is a barrier curb integral with pavement slab. Curbs should be placed on undisturbed subgrade or subgrade compacted to the same density as subgrade of adjacent road.

### **3.2.3 LOCATION IN REGARD TO LANE WIDTH.**

**3.2.3.1 TYPE I, III, OR IV (BARRIER CURBS).** It is necessary to offset barrier curbs a sufficient distance from the edge of the nearest traffic lane to prevent reduction in capacity. Curb offset and traffic lane width for classified roads and streets designed with barrier curbs are shown in tables 1-1 and 1-2.

**3.2.3.2 TYPE II CURBS.** Mountable curbs cause very little, if any, lateral displacement of traffic adjacent to these curbs; therefore, it is acceptable to locate Type II curbs at the edge of a traffic or parking lane.

## **3.3 ROAD AND STREET APPENDAGES.**

### **3.3.1 SHOULDERS.**

**3.3.1.1 WIDTH.** Shoulder widths should be as stated in tables 1-1 and 1-2.

**3.3.1.2 SHOULDERS FOR ROADS.** Roads in rural areas are normally designed without curbs and require full width shoulders to accommodate high traffic volumes. Geometric design criteria for shoulders on roads are presented in table 1-1.

**3.3.1.3 SHOULDERS FOR STREETS.** As a general rule, streets in cities are designed with some type of barrier curb and do not require shoulders except where needed for lateral support of the pavement and curb structure. Where lateral support is required, the shoulder should be at least 4 feet in width where feasible. In other sections within built-up areas, where desirable to design streets without barrier curbs, geometric design criteria are presented in table 1-2.

### **3.3.2 MEDIANS.**


**3.3.2.1 USES.** Where traffic volume requires construction of multilane highways, opposing traffic should be separated by medians. Medians should be highly visible both day and night, and there should be a definite color contrast between median and traffic lane paving. The absolute minimum width for a median is 4 feet with a desirable minimum width of 14 feet.

**3.3.2.2 TYPES.** Cross sections of medians are illustrated in figure 3-1. It is not necessary that medians be of uniform width throughout the length of divided highways.


**3.3.2.3 CURBS.** All design criteria relative to curbs presented herein are applicable to median curbs.

### **3.3.3. GUARDRAILS AND GUIDEPOSTS.**


**3.3.3.1 USES.** For safety and guidance of traffic, guideposts should be provided at all locations along roadways where drivers may become confused, particularly at night, as to the direction of the roadway; along roadways subject to periodic flooding; along roadways where fog exists for long periods of time; and where driving off the roadway is prohibited for reasons other than safety. Guardrails are normally required at locations where vehicles accidentally leaving the roadway might be damaged, resulting in injury to occupants. Guardrails or guideposts should conform to local highway department criteria.

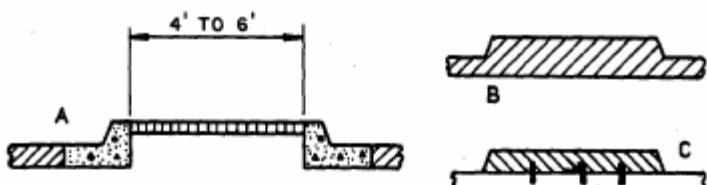


1. CURBED AND CROWNED: PAVED

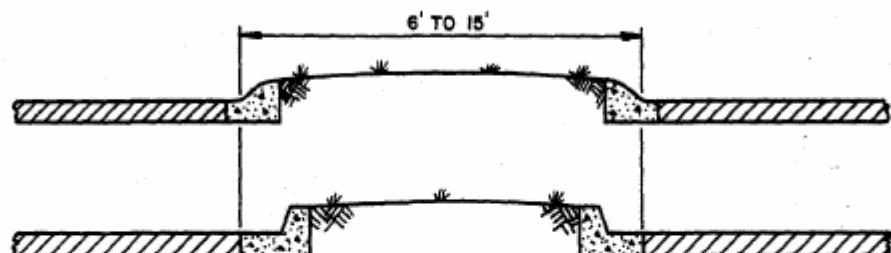

2. CURBED AND CROWNED: TURF COVER

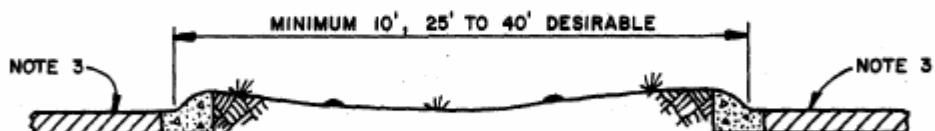

3. CURBED AND DEPRESSED: TURF COVER

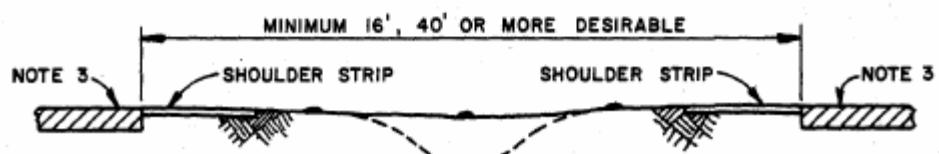

4. FLUSHED AND DEPRESSED: TURF COVER

FIGURE 3-1  
CROSS SECTIONS OF GENERAL TYPES OF MEDIANS

- NOTES:
1. Curbs and paved median may be monolithic as in 1-B or may be surface-mounted on monolithic pavement as in 1-C. If surface-mounted, the curb-and-median slab must be anchored or bonded to the pavement (1-C).
  2. All medians less than 10 feet wide should be designed with barrier curbs. If vegetation is to be maintained on median, or if snow removal will be required, the minimum width of median should be 10 feet. Separating guardrails will be installed in medians if justified by traffic conditions.
  3. Where depressed medians are used for 4-lane highways, opposing lanes are to utilize standard Class B 2-lane roads design.

FIGURE 3-1 (CONTINUED)  
CROSS SECTIONS OF GENERAL TYPES OF MEDIAN

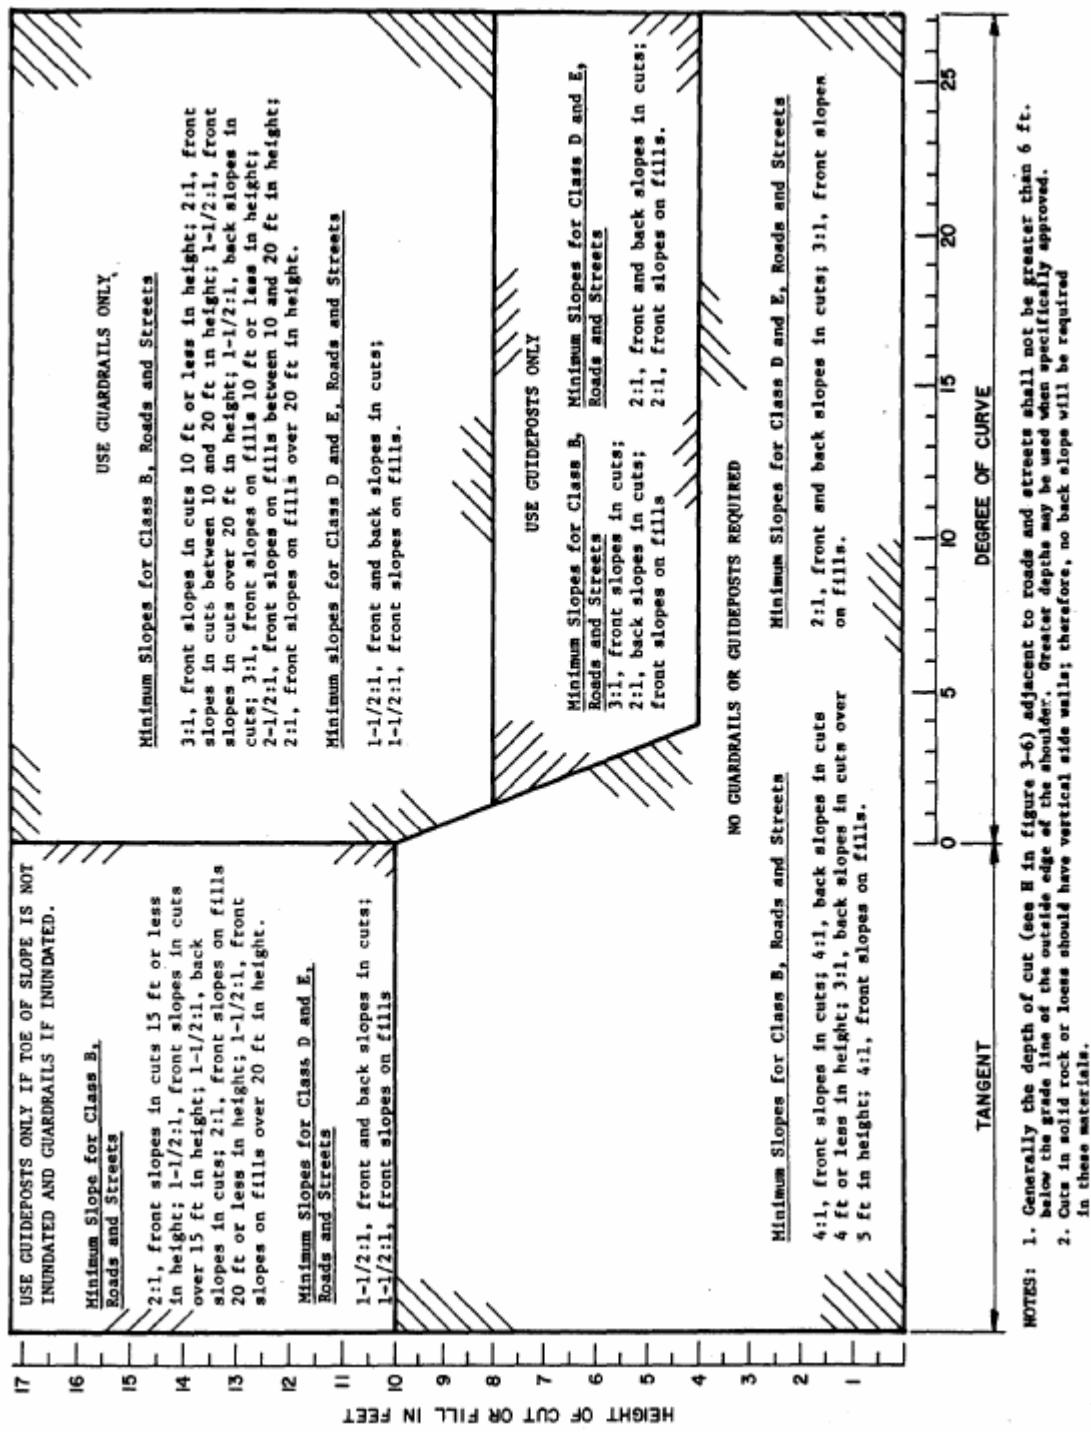


FIGURE 3-2  
DESIGN CRITERIA: GUARD RAILS, GUIDE POSTS AND SIDE SLOPES

**3.3.3.2 DESIGN CRITERIA.** Guardrails or guideposts are not normally required where the front side slopes are 4:1 or flatter. Design criteria for determining where guardrails or guideposts are required is shown by figure 3-2. The ordinate of this figure, designated "Height of Cut or Fill in Feet," is used in this manual to refer to the vertical distance between the outside (intersection of shoulder and front slope planes) edge of the shoulder and the toe of the front slope in cuts and on fills, or between the toe and top of back slope in cuts.

**3.3.3.3 LOCATION WITH RESPECT TO EDGE OF PAVEMENT.** Guardrails or guideposts should be located at a constant offset from the edge of a pavement outside the limits of the usable shoulder and with an elevation of the base between 4 inches and 9 inches below the edge of the lane pavement. Shoulder widths shown in tables 1-1 and 1-2 will be widened 2 feet to provide space for installation of guardrails or guideposts. Guardrails or alignment of guideposts should be flared outward and, if required, buried on the traffic approach end and tapered in at narrow structures to meet curb lines.

**3.3.3.4 MARKING.** Guardrails and guideposts must be highly visible, particularly at night. All guardrails and guideposts should be marked or painted in accordance with AASHTO safety requirements.

**3.3.4 EARTH SLOPES.** In determining inclination of side slopes, proper consideration should be given to drainage, maintenance, erosion, and stability. It may be difficult to control erosion of some soils on steep slopes (4:1 or steeper), and it may be impossible to control erosion or maintain vegetation cover on slopes steeper than 2:1. If maintenance is to be accomplished without special equipment, side slopes should not be steeper than 3:1. It is essential that side slopes along highways be flat enough to assure stability under all normal conditions. Design criteria for selecting earth slopes is presented in combination with design policy for establishing need for guardrails and guideposts in figure 3-2.

**3.3.5 BRIDGE CLEARANCE.** Requirements affecting highway safety are found in AASHTO HB-12.

**3.3.5.1 HORIZONTAL.** The minimum horizontal distance between curbs on bridges should be equal to the width of the approaching roadway including traffic lanes, parking lanes, full width of shoulders, and medians (on divided highways). When the cost of parapets and railings is less than the cost of decking the median area, traffic lanes for traffic in opposing directions will be on separate structures. It is usually more economical to pave over the median area on bridges with a median width less than about 15 feet.

**3.3.5.2 VERTICAL.** The minimum vertical clearance will be at least 14 feet over all traffic lanes, parking lanes, and shoulders.

**3.4 SIGHT DISTANCE.** The length of roadway visible ahead of a vehicle along a highway is termed "sight distance." Sight distance is divided into two categories: stopping sight distance and passing sight distance. Minimum stopping and passing sight distances are shown in tables 1-1 and 1-2. Effort should be made to provide sight distances greater than those shown.

**3.4.1. STOPPING SIGHT DISTANCE.** On single-lane roads, the stopping sight distance must be adequate to permit approaching vehicles each to stop. Horizontal curve sight distance will be critical and will be twice that required for a two or more, lane highway.

**3.4.2 PASSING SIGHT DISTANCE.** Passing sight distance should be provided as frequently as possible along two-lane, two-way roads, and a length equal to or greater than the minimum values shown in table 1-1 should be provided. The minimum passing sight distances in table 1-1 provide safe distances for a single isolated vehicle traveling at design speed to pass a vehicle going 10 mph less than design speed. Sight distances

and safe passing sections should be shown on all construction and improvement plans to aid in proper marking and sign placement.

### **3.5 HORIZONTAL ALINEMENT.**

**3.5.1 GENERAL.** Where changes in horizontal alinement are necessary, horizontal curves should be used to affect gradual change between tangents. In all cases; consideration should be given to the use of the flattest curvature practicable under existing conditions. Adequate design of horizontal curves depends upon establishment of the proper relations between design speed and maximum degree of curvature (or minimum radius) and their relation to superelevation. The maximum degree of curvature is a limiting value for a given design speed and varies with the rate of superelevation and side friction factors.

#### **3.5.2 MAXIMUM CURVATURE.**

**3.5.2.1 ROADS.** Desirable and absolute values for use in design of horizontal curves on superelevated roads are shown in table 1-1. The absolute maximum curvature for roads without superelevation is the same as shown for streets with normal crown sections in table 1-2.

**3.5.2.2 STREETS.** Absolute maximum values for degree of curvature on streets in built-up areas are shown in table 1-2. Absolute maximum values are given for streets with normal crown sections (no superelevation) and with superelevated sections.

**3.5.3 SUPERELEVATION.** A practical superelevation rate together with a safe side friction factor determines maximum curvature. Superelevation rate and side friction factors depend upon speed, frequency and amount of precipitation and type of area, i.e., built-up or open. Superelevation rates will be determined in accordance with AASHTO GD-2.

### **3.5.4 WIDENING OF ROADS AND STREETS.**

**3.5.4.1 PAVEMENTS ON ROADS AND STREETS** will be widened to provide operating conditions on curves comparable to those on tangents. Widening is necessary on certain highway curves because long vehicles occupy greater width and the rear wheels generally track inside the front wheels. The added width of pavement necessary can be computed by geometry for any combination of curvature and wheelbase. Generally, widening is not required on modern highways with 12-foot lanes and high type alignment, but for some combinations of speed, curvature, and width, it may be necessary to widen these highways also. The amount of widening required on horizontal curves on roads is shown in table 3-1.

**3.5.4.2 THIS IS THE WIDENING NORMALLY** required for off-tracking and may not provide clearance where sight is restricted. The additional width should be added to the inside of the curve, starting with zero at the TS (tangent-spiral), attain the maximum at the SC (spiral-curve), and diminishing from the maximum at the CS (curve spiral) to zero at the ST (spiral-tangent) as shown in figure 3-3. Increased sight distance may be provided by additional widening or by removal of sight obstructions. The latter is normally recommended because it is generally more economical. Figure 3-4 shows the relation between sight distance along the center line of the inside lane on horizontal curves and the distance to sight obstructions located inside these curves. The clear sight distance along the center line of the inside lane on horizontal curves should equal the minimum stopping sight distance shown in table 1-1 for the design speed.

### **3.6 VERTICAL ALIGNMENT.**

**3.6.1 GRADE.** Design of vertical alignment involves the establishment of longitudinal grade or slope for roads, streets, and highways. The key considerations for determining grades are speed reduction for maximum grade and drainage for minimum grade.

**3.6.1.1 DETERMINING MAXIMUM GRADE.** The maximum allowable grade is dependent on the length the grade is sustained. The critical length of grade is the distance a design vehicle with a 40,000 pound gross weight and a 100-hp engine can travel up a designated grade before speed is reduced below an acceptable value (usually 30 mph). Critical lengths for grades are shown in tables 1-1 and 1-2. If a grade exceeds critical length, highway capacity is reduced unless a climbing lane is added for heavy vehicles.

**3.6.1.2 DETERMINING MINIMUM GRADE.** Tables 1-1 and 1-2 give minimum grades which are adequate for proper drainage.

**3.6.2 CURVES.** Generally, vertical curves should be provided at all points on roads or streets where there is a change in longitudinal grade. The major control for safe vehicle operation on vertical curves is sight distance, and the sight distance should be as long as possible or economically feasible. Minimum sight distance required for safety must be provided in all cases. Vertical curves may be any one of the types of simple parabolic curves shown in figure 3-5. There are three length categories for vertical curves: maximum, length required for safety, and minimum. All vertical curves should be as long as economically feasible. The minimum length of vertical curves is also shown in tables 1-1 and 1-2.

**3.7 CROSS SECTION.** Figure~ 3-6 and 3-7 illustrate typical combinations of cross-section elements for which geometric design criteria are outlined in tables 1-1 and 1-2. Other combinations of these cross-section elements are illustrated in AASHTO GU-2.

### **3.7.1 ROADS.**

**3.7.1.1 NORMAL-CROWN SECTION.** The typical road-type, normal crown cross section shown in figure 3-6 comprises the so-called "streamlined" cross section. Shoulder edges, channel bottoms, and the intersection of side slopes with original ground are rounded for simplification of maintenance and appearance. On roads in

open areas rounding of shoulder edges will be restricted to a strip 3 to 4 feet wide at the intersection of slopes steeper than 2-1/2:1, and only slight rounding will be used at intersections of slopes flatter than 2-1/2:1.

Widening, in Feet, for 2-Lane Pavements on Curves for Width of Pavement on Tangent of:															
Degree of Curve	24 feet				22 feet				20 feet						
	30	40	50	60	70	80	30	40	50	60	70	30	40	50	60
1	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.5	0.5	1.0	1.0	1.5	1.5	1.5	2.0
2	0.0	0.0	0.0	0.5	0.5	0.5	1.0	1.0	1.0	1.5	1.5	2.0	2.0	2.0	2.5
3	0.0	0.0	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.5	1.5	2.0	2.0	2.5	2.5
4	0.0	0.5	0.5	1.0	1.0	1.0	1.0	1.5	1.5	2.0	2.0	2.0	2.5	2.5	3.0
5	0.5	0.5	1.0	1.0			1.5	1.5	2.0	2.0	2.0	2.5	2.5	3.0	3.0
6	0.5	1.0	1.0	1.5			1.5	2.0	2.0	2.5	2.5	3.0	3.0	3.0	3.5
7	0.5	1.0	1.5				1.5	2.0	2.5			2.5	3.0	3.5	
8	1.0	1.0	1.5				2.0	2.0	2.5			3.0	3.0	3.5	
9	1.0	1.5	2.0				2.0	2.5	3.0			3.0	3.5	4.0	
10-11	1.0	1.5					2.0	2.5				3.0	3.5		
12-14.5	1.5	2.0					2.5	3.0				3.5	4.0		
15-18	2.0						3.0					4.0			
19-21	2.5						3.5					4.5			
22-25	3.0						4.0					5.0			
26-26.5	3.5						4.5					5.5			

NOTES: Values less than 2.0 may be disregarded.

3-lane pavements: multiply above values by 1.5.


4-lane pavements: multiply above values by 2.

Where semitrailers are significant, increase tabular values of widening by 0.5

for curves of 10 to 16 degrees, and by 1.0 for curves 17 degrees and sharper.


Table 3-1

Calculated and Design Values for Pavement Widening on Roads and Streets within a Typical Installation 2-Lane Pavements, One-Way or Two-Way

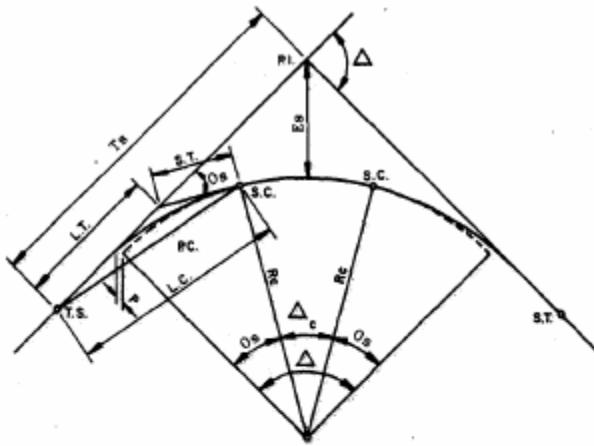

#### TRANSITION SYMBOLS

P.I. - Point of intersection of main tangents.	E.s - External distance P.I. to center of circular curve portion.
T.S. - Common point of tangent and spiral.	L.T. - Long tangent distance of spiral only.
S.T. Spiral and tangent.	S.T. - Short tangent distance of spiral only.
S.C. - Spiral curve, common point of spiral and circular curve of near transition.	P - Offset distance from the tangent of P.C. of circular curve produced.
C.S. - Curve spiral, common point of circular curve and spiral of far transition.	Delta - Intersection angle between tangents of entire curve.
R.c. - Radius of circular curve.	Delta_c - Intersection angle between tangents at S.C. and at the C.S. or the central angle of the circular curve portion of the curve.
L.s - Length of spiral between T.S. and S.C.	O.s - Intersection angle between the tangent of the complete curve and the tangent at the S.C., The spiral angle.
T.s - Tangent distance P.I. to T.S. or S.T. or Tangent distance of the complete curve.	W - Widening
L.C. - Straight Line Chord distance T.S. to S.C.	
K - Distance from T.S. to point on tangent opposite the P.C. of the circular curve produced.	

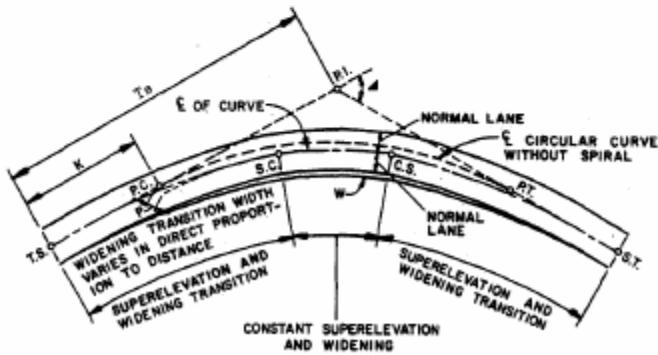

To locate spiral transition, use tables as given in Transition Curves for Highways, (See appendix A, Government Depository Libraries)

FIGURE 3-3

METHOD OF LAYOUT OF WIDENING AND SUPER-ELEVATION OF SPIRAL LANES

$$m = \frac{5730}{D} \text{ VERS } \frac{50}{200}$$

Also  $m = R(\text{VERS } \frac{2865S}{R})$ .

And  $S = \frac{R}{2865} \cos^{-1} \left( \frac{R-m}{R} \right)$




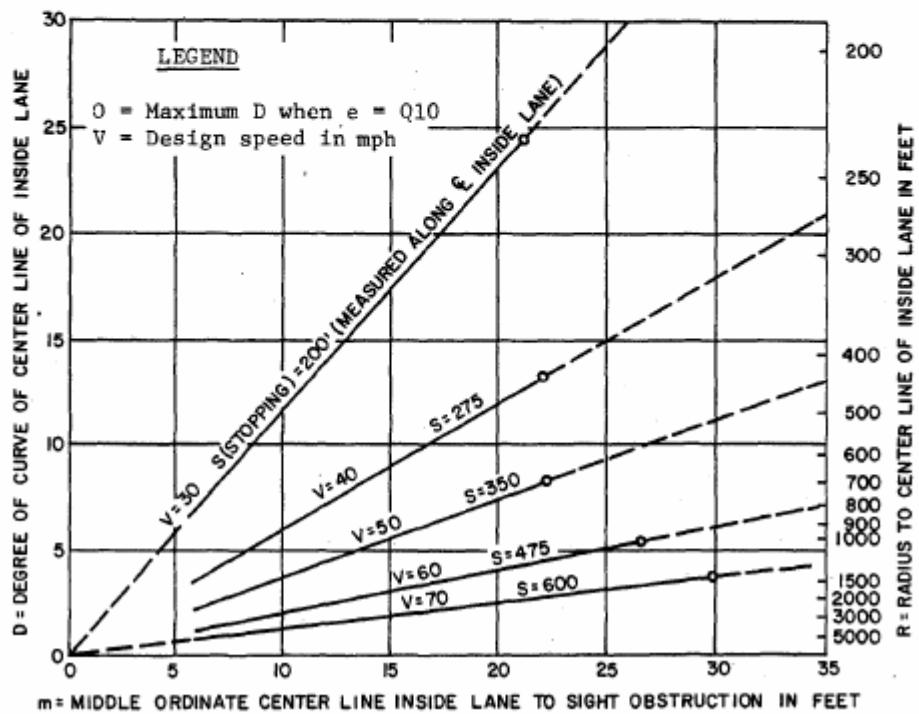


FIGURE 3-4  
STOPPING SIGHT DISTANCE ON HORIZONTAL CURVES, OPEN ROAD  
CONDITIONS

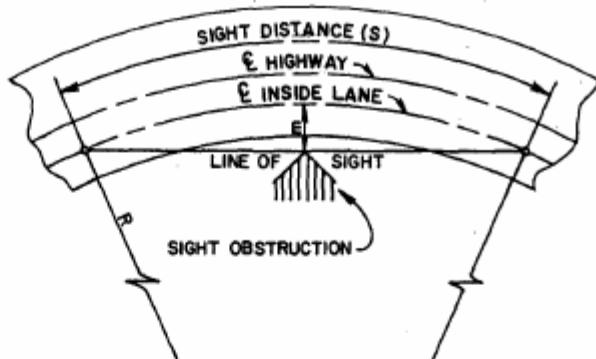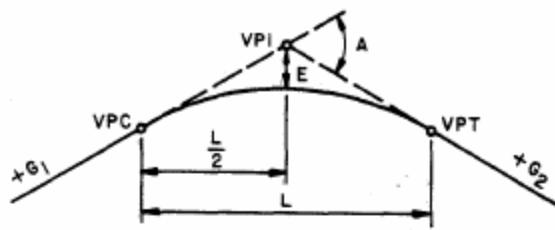


TYPE I

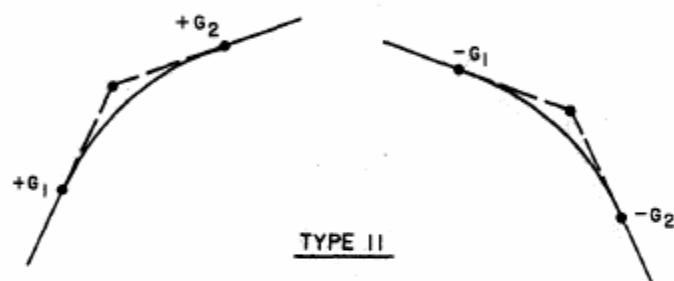

TYPE II

CREST VERTICAL CURVES

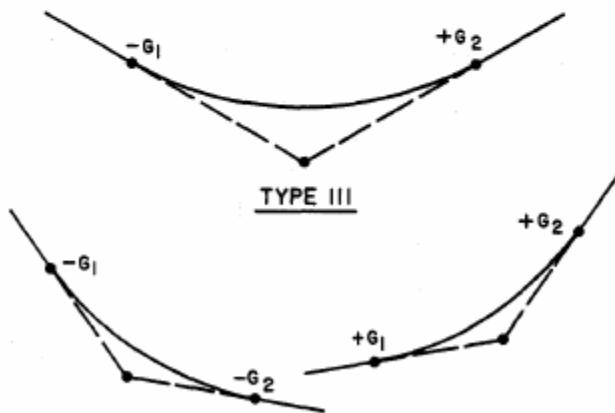

TYPE III

SAG VERTICAL CURVES

FIGURE 3-5  
TYPES OF VERTICAL CURVES

**3.7.1.2 SUPERELEVATED SECTION.** Figure 3~6 shows the preferable superelevated cross sections for roads at Army installations. The low side of this cross section is similar to a normal-crown section except that the shoulder slope on the low side of the section is the same as the pavement superelevation, except where normal slope is greater. On the high side of a superelevated section the algebraic difference in cross slopes at the pavement edge should not exceed about 0.07. The vertical curve should be at least 4 feet long, and at least the inside 2 feet of the shoulder should be held on the superelevated slope.

**3.7.2 STREETS.** Typical street-type cross sections with and without parking are shown in figure 3-7. Geometric design for the various cross-section elements shown are presented in table 1-2.

### **3.8 INTERSECTION CRITERIA.**

**3.8.1 GENERAL.** Practically all highways within many installations will intersect at grade, and normally the designer will need to consider only plain unsignalized or signalized intersections. Intersections are normally closely spaced at regular intervals along streets in built-up areas, and the capacity of these streets will in most cases be controlled by intersection capacity.

**3.8.2 DESIGN CRITERIA.** Geometric design criteria for intersections are presented in AASHTO GD-3, GU-2, SR-2 and the TRB Highway Capacity Manual.

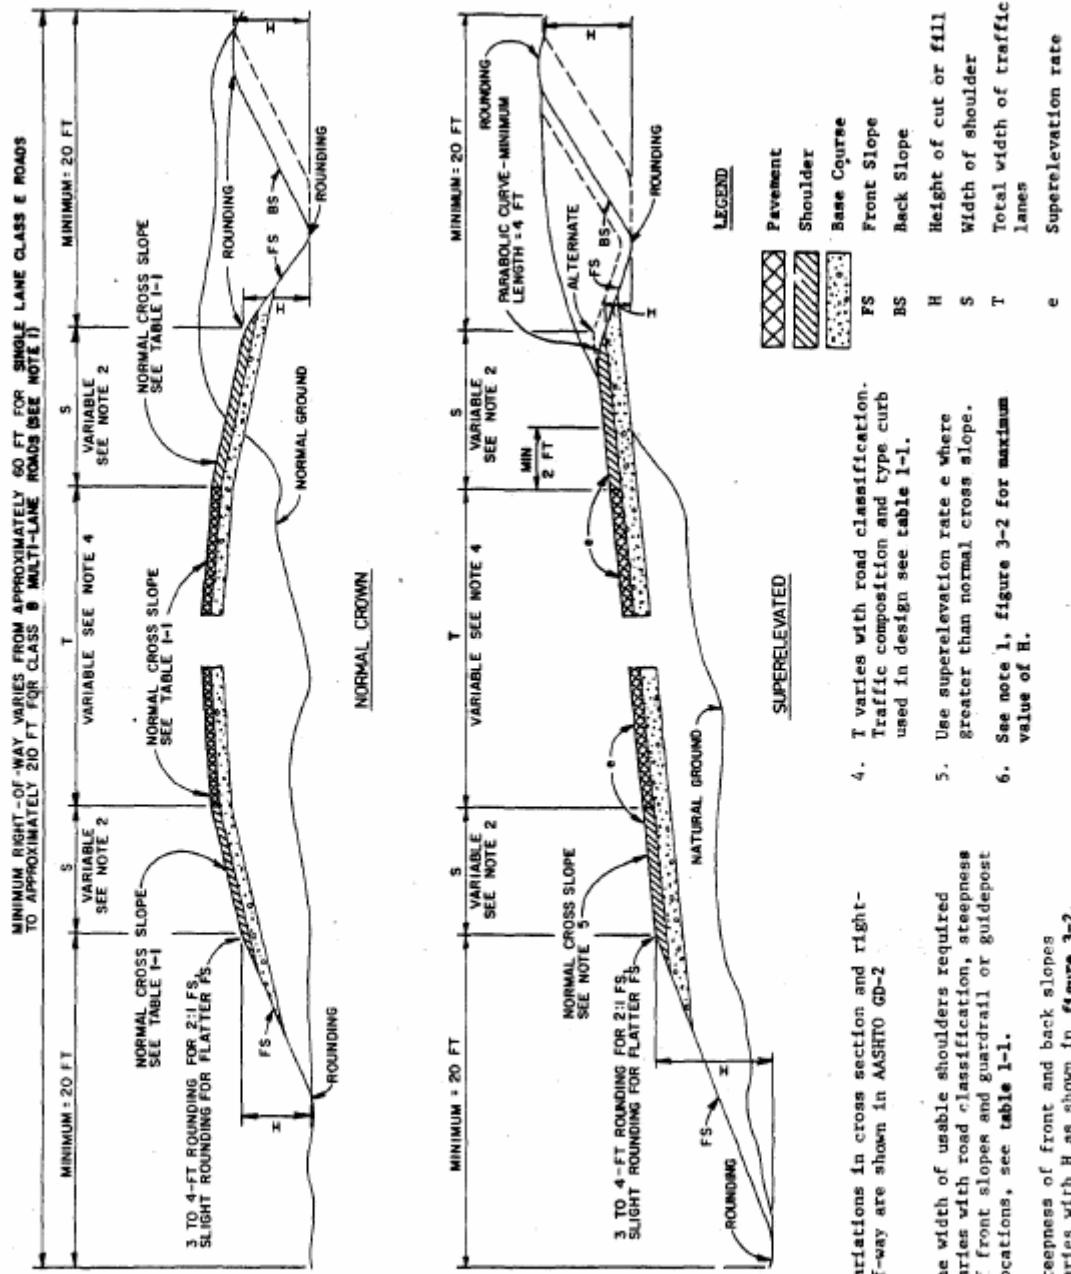


FIGURE 3-6  
TYPICAL ROAD-TYPE CROSS SECTIONS

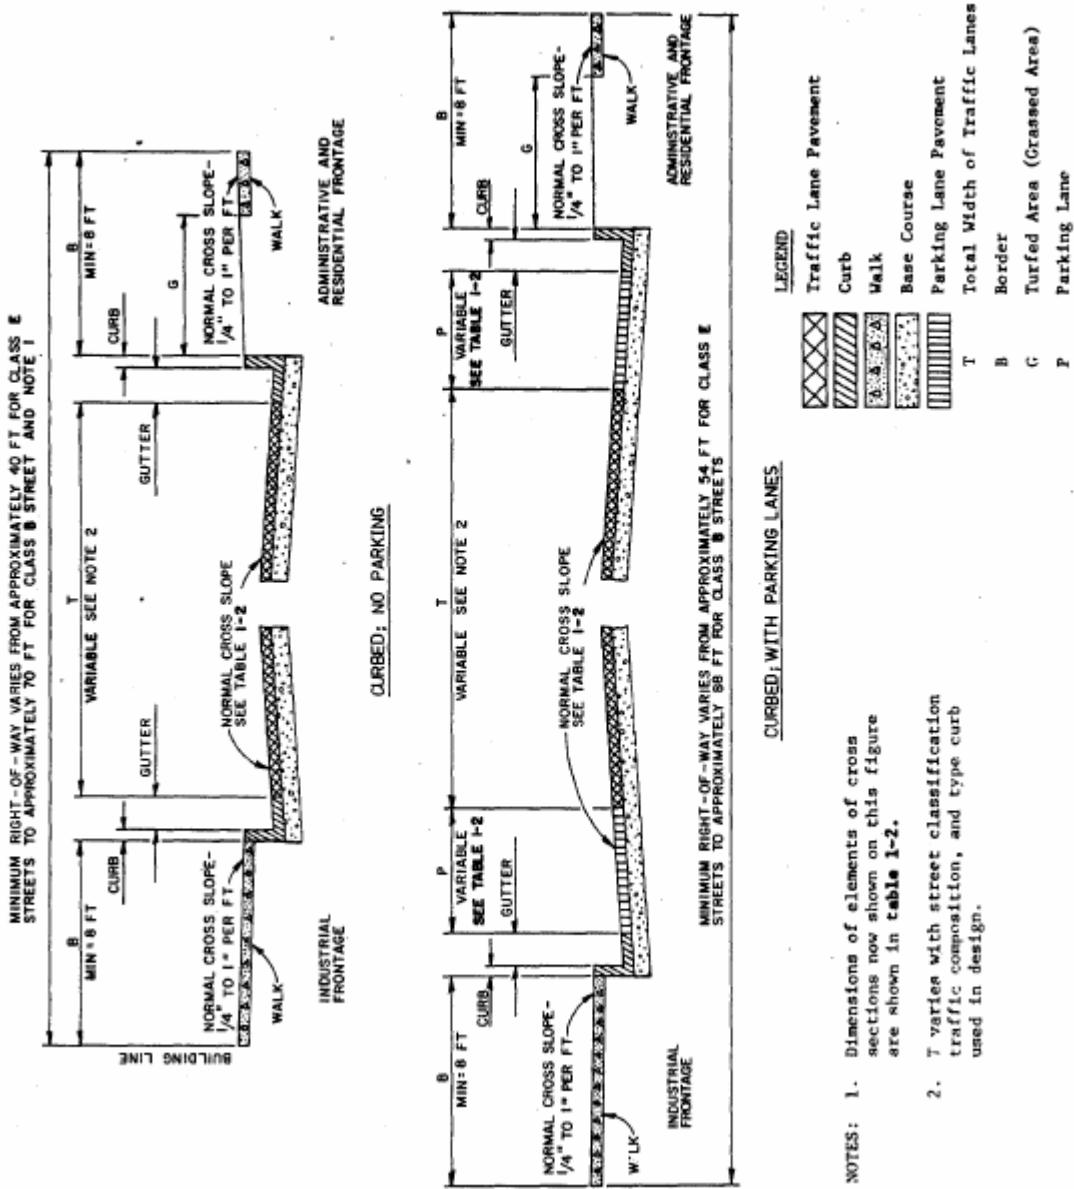


FIGURE 3-7  
TYPICAL STREET-TYPE CROSS SECTIONS

### **3.8.3 REPRESENTATIVE INSTALLATION AREAS EQUIVALENT TO DESIGN CRITERIA AREAS.**

Variations in average intersection capacities on one-way and two-way streets subject to fixed time signal control are shown for general types of areas within cities in the TRB Highway Capacity Manual. The curves used at a particular location on typical installations should be selected on the basis of similarity with the type of area indicated in the TRB Highway Capacity Manual. The following tabulation indicates areas in which the intersection curves should normally be used.

<u>Area Designation Used in Highway Capacity Manual</u>	<u>Equivalent Area</u>
Downtown	Central portion of built-up areas at major installations
Fringe, business district	Central portion of built-up areas at all but major installations. Industrial, service, and warehouse areas at major installations.
Outlying business district and intermediate residential	Residential portion of built-up areas at major installations. Industrial, service, warehouse, and residential portions of built-up areas at intermediate installations. All built-up areas at small installations, isolated shopping centers, community centers, and similar areas of public assembly in open areas. Isolated road intersections in open areas.
Rural	TRB Highway Capacity Manual.

**3.9 CAPACITY OF INTERSECTIONS.** The capacity (DHV) shown in tables 1-1 and 1-2 is for free-flowing highways without intersections at grade or with few crossroads and minor traffic. These highways have no traffic control signals at intersections (plain unsignalized intersections), and capacity is affected very little and uninterrupted flow is assumed. The AASHTO procedure is suggested as a guide in design of intersections.

**AASHTO Suggested Design Hourly Volume Combinations for  
Which Signal Control Should be Assumed in Geometric  
Design of Intersections.**

Type of Intersection	Minimum Two-Way DHV		
2-lane through highway	400	500	650
Crossroad	250	200	100
4-lane through highway	1,000	1,500	2,000
Crossroad	100	50	25

This tabulation may serve as a general guide for design of at-grade intersections in the following manner. If the DHV of traffic at a given intersection is approximately equal to or less than that shown in the tabulation, capacity of the through highway is based on the DHV shown in tables 1-1 and 1-2, and no intersection capacity analysis is required. If the DHV of traffic is greater than that shown in this tabulation, the intersection should be designed as if it were under signal control. The geometric layout should be made in conjunction with an intersection capacity analysis, as in the Highway Capacity Manual. The volumes shown in this tabulation have no relation to warrants for signalization, nor are they indicative of whether or not signalization should be used. Warrants for traffic control signals are given in ANSI D6.1.

### **3.10 INTERSECTION CURVES.**

**3.10.1 MINIMUM EDGE OF PAVEMENT DESIGN.** Where it is necessary to provide minimum space for turning vehicles at unsignalized at-grade intersections, the AASHTO design criteria presented in GU-2 and SR-2 should be used. The minimum radius for edge of pavement design on street intersections is 30 feet, which is required for passenger (P) cars on 90-degree turns. A larger radius should be used if any truck traffic is expected or turning speeds greater than 10 mph are anticipated. The minimum radius on road intersections is 50 feet.

**3.10.2 MINIMUM CURB RADII.** Minimum curb radii are normally used at plain unsignalized intersections to reduce intersection area and minimize conflict between pedestrians and vehicles. The curb design should fit the minimum turning path of the critical design vehicle expected in the traffic. Generally, the minimum curb radii to be used on intersection curves may be determined on the basis of the following information.

**3.10.2.1 CURB RADII** of 15 to 25 feet are adequate for P design vehicles and should be used on Classes D and E cross streets where practically no single unit (SU) truck, WB40, WB50, and WB60 (semitrailer combination trucks) design vehicles are expected or at major intersections where parking is permitted on both intersecting streets. Radii of 25 feet should be provided on all new construction and on reconstruction where space is available.

**3.10.2.2 CURB RADII** of 30 feet or more should be provided at all major highway intersections to accommodate an occasional truck in the traffic. (See table 2-1 for minimum turning radius.)

**3.10.2.3 RADII OF 40 FEET OR MORE**, preferably three-centered compound curves, to fit the path of the critical design vehicle expected in the traffic, should be provided where SU, WB40, WB50, and WB60 design vehicles turn repeatedly. (See table 2-1 for minimum turning radius.)

## **3.11 MISCELLANEOUS.**

**3.11.1 SIGNING.** Signs should conform to ANSI 06.1 standards.

**3.11.2 PAVEMENT MARKINGS.** Marking should be provided on paved surfaces as a safety measure and to increase orderly traffic flow. Markings should conform to local highway practice criteria. Standard requirements are provided in ANSI 06.1 on uniform traffic control devices.

# QUIZ

## An Introduction to Geometrics for Roads and Streets

1. The volume and \_\_\_\_\_ of the traffic determines the geometric requirements for roads and streets.
  - a. speed
  - b. composition
  - c. design speed
  - d. density
  
2. Highways are generally typed according to the number of traffic lanes as single-, two-, and three-lane, and \_\_\_\_\_ or divided multilane (four or more traffic lanes) highways.
  - a. unrestricted
  - b. restricted
  - c. undivided
  - d. limited access
  
3. For a two-lane road in an open (rural) area with rolling terrain, and with traffic composition consisting of 30% busses and trucks (T=30%), Average Daily Traffic (ADT) = under 1600, and design hourly volume (DHV) =390, a Class \_\_\_\_\_ road is recommended.
  - a. E
  - b. D
  - c. B
  - d. A
  
4. For a two-lane street in a buildup area with flat terrain, and with traffic composition consisting of 20% busses and trucks (T=20%), Average Daily Traffic (ADT) = under 1800, and design hourly volume (DHV) =220, a Class \_\_\_\_\_ road is recommended.
  - a. E
  - b. D
  - c. B
  - d. A
  
5. For single lane Class E roads in mountainous terrain, and where shoulders are not sufficiently stable to permit all-weather use and the distance between intersections is greater than 1/2 mile, turnouts should be provided at \_\_\_\_\_ mile intervals for use by occasional passing or meeting vehicles.

- a. 1
- b. 1/2
- c. 1/4
- d. 1/8

6. Traffic volumes are expressed as Average Daily Traffic (ADT). The ADT represents the total traffic volume for the year divided by \_\_\_\_\_.

- a. 365
- b. 52
- c. 12
- d. 4

7. The \_\_\_\_\_ volume represented as an average daily peak hour is the basis of the DHV. The DHV is to be used for geometric design.

- a. instantaneous
- b. median
- c. rush hour
- d. maximum

8. Traffic on installation roads and streets may consist of a combination of passenger cars, light-delivery trucks, single-unit trucks, truck combinations, buses, and other vehicles. Trucks, buses, and other vehicles have more severe operating characteristics, \_\_\_\_\_, and consequently impose a greater traffic load on highways than do passenger cars and light-delivery trucks.

- a. occupy more road space
- b. make more repetitive trips
- c. have higher CBR requirements
- d. lower frequency

9. Vehicular speed varies according to the physical characteristics of the vehicle and highway, weather conditioning, volume of traffic, and the \_\_\_\_\_ and other roadside features.

- a. type of shoulders
- b. length of passing lanes
- c. sight distances
- d. average vehicular spacing

10. The \_\_\_\_\_ for design is the major control in designing physical features of highways.

- a. lane width
- b. speed selected
- c. ADT

d. DHV

11. The capacity of a road or street will vary with lane width, \_\_\_\_\_, condition and width of shoulders, profile and alignment, and with the composition and speed of traffic.

- a. center line configuration (solid, dashed, double)
- b. distance to lateral obstructions
- c. average vehicular separation
- d. truck traffic percentage

12. Selection of proper pavement cross slope depends upon \_\_\_\_\_, vehicle characteristics, curb requirements, and general weather conditions.

- a. speed
- b. super-elevation
- c. speed-curvature relations
- d. peak storm water drainage

13. Curbs are classified as barrier or \_\_\_\_\_ according to their intended use.

- a. gutter
- b. sloped
- c. mountable
- d. drop inlet

14. Where \_\_\_\_\_ require(s) construction of multilane highways, opposing traffic should be separated by medians.

- a. Jersey barriers
- b. zoning/planning authorities
- c. weather conditions
- d. traffic volume

15. Guardrails and guideposts must be highly visible, particularly at night. All guardrails and guideposts should be marked or painted in accordance with \_\_\_\_\_ safety requirements.

- a. DOT
- b. AASHTO
- c. NHSTB
- d. TRB