




A Review of Traffic Simulation Software

A Review of Traffic Simulation Software

By

Khaled Shaaban, Ph.D., P.E., PTOE

PDHLibrary Course No 2019005
2 PDH HOURS

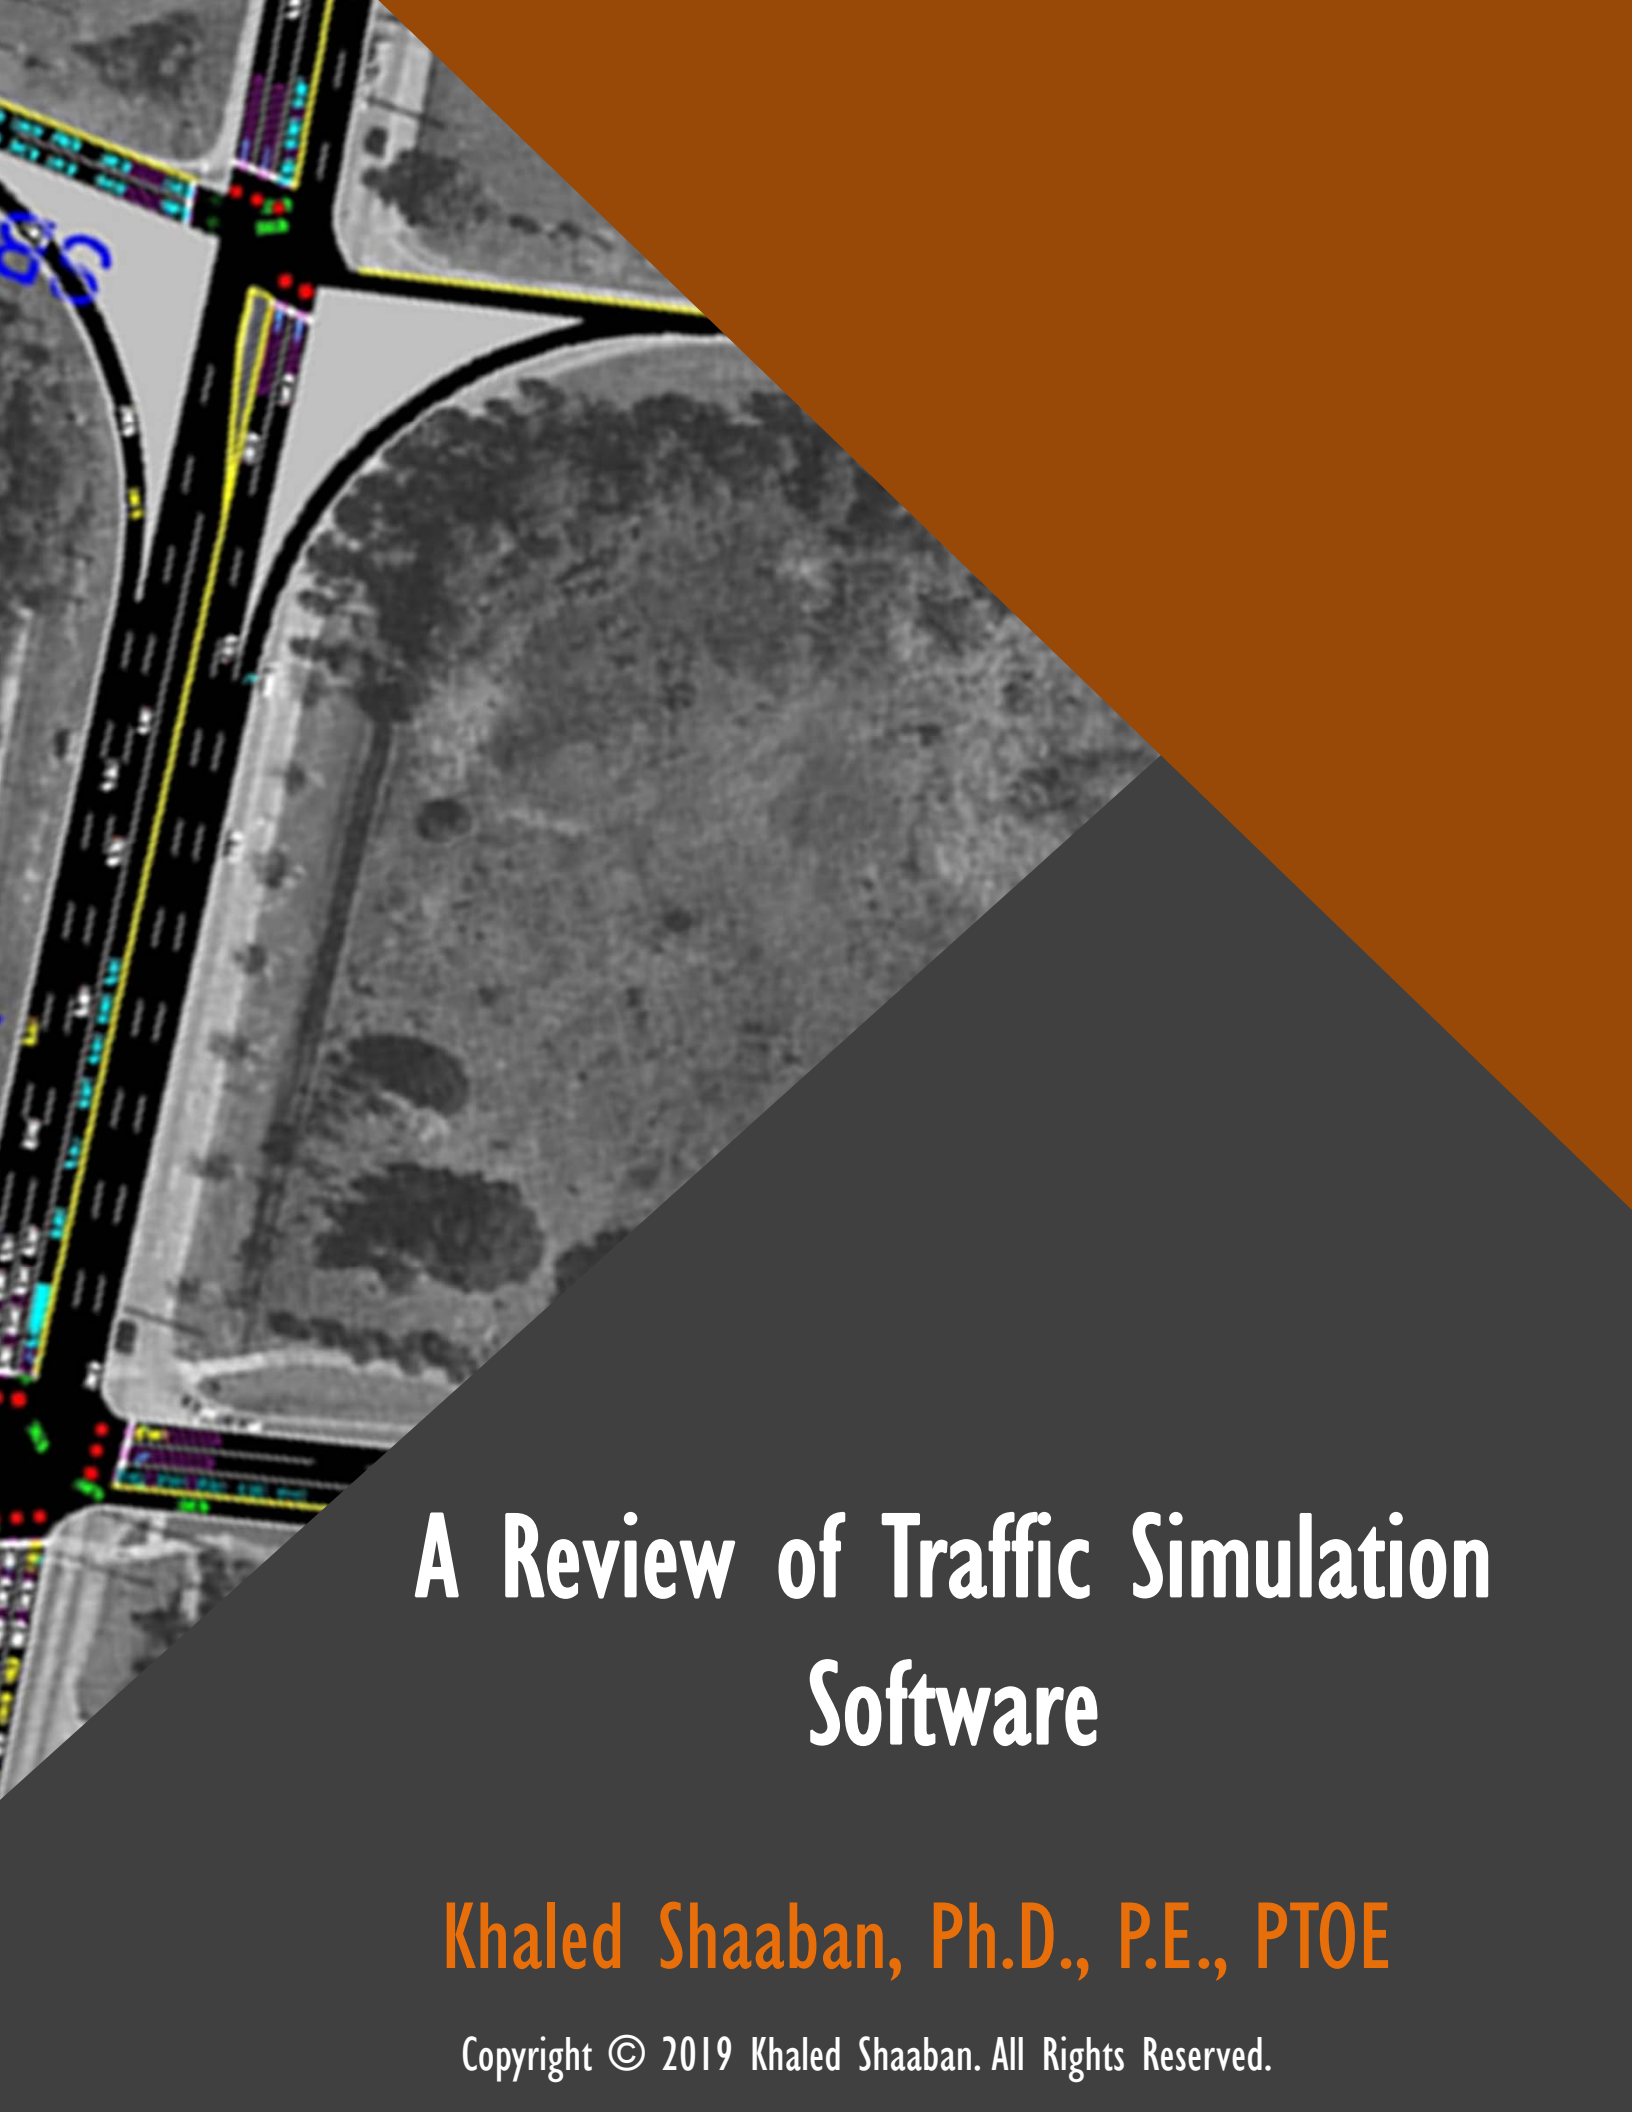An aerial photograph of a road intersection, likely a T-junction, with a traffic simulation overlay. The simulation shows various colored dots (red, green, blue, yellow) representing vehicles at the intersection and along the road. The road has multiple lanes, and there are some blue markings on the left side. The background is a mix of grey pavement and green vegetation. The image is split diagonally from the top right to the bottom left, with the top right portion being a solid orange color and the bottom left portion being a solid dark grey color.

A Review of Traffic Simulation Software

Khaled Shaaban, Ph.D., P.E., PTOE

Copyright © 2019 Khaled Shaaban. All Rights Reserved.

Contents

Abstract.....	1
1 Introduction	2
2 Past Work	3
3 Model Calibration.....	7
3.1 Overview	7
3.2 Routing Decision and Routes	7
3.3 Priority Rules with Minimum Headway and Gap Time	9
3.4 Data Collection.....	9
4 Analysis	10
4.1 Experimental Design.....	10
4.2 Average Delay.....	11
4.3 Test for Equality of Variances between Series	14
4.4 Test for Equality of Means between Series.....	14
4.5 Correlation between VISSIM and SimTraffic Average Delay	15
5 Summary and Conclusions	16
References.....	17

A Review of Traffic Simulation Software

Abstract

SimTraffic and VISSIM are two microscopic traffic simulation tools that are capable of modeling arterial roads with signalized intersections and roundabouts. This review compares the performance of the two simulation tools under different scenarios such as traffic volume, the proportion of left turning movement, and the proportion of trucks in the traffic flow. The two simulation tools did not show a statistically significant difference in general. However; in the case of high traffic volumes, VISSIM showed higher average delays than those from SimTraffic compared to nearly identical results in the case of low traffic volumes.

Keywords: Microsimulation; Transport modeling; SimTraffic; VISSIM; Sensitivity analysis

1 Introduction

The need for microsimulation modeling has been considered by traffic professionals in order to have an advanced understanding of an overview of traffic and to identify current problems and suggest possible immediate solutions¹. It also helps test alternative traffic operating systems in a simulated environment, which provides a platform for performance comparison of varying solutions for decision-making².

Furthermore, different studies³ also believed that simulation modeling could save users huge amounts of time, effort and money and also ensure safety by not interrupting real-world traffic conditions if the calibration of the traffic micro-simulation is done logically in conducting the analysis of a transport system.

Researchers categorized simulation software packages into two categories based on the method of calculation⁴. One is a deterministic model. The other is a stochastic model. The deterministic model evaluates performance based on the relationship between traffic flow and capacity along with operational properties such as delay and queues⁵. The stochastic model analyzes roundabouts based on probability in relation to the randomness of traffic phenomenon^{6,7}.

Deterministic models can be drilled down into two models⁸. One is a statistical model (empirical model). The other is an analytical model (semi-probabilistic model). The statistical model is a regression model developed from field data. This model represents the relationship between the capacity for each direction and the circulating flow rate. The software package RODEL was developed in the United Kingdom by modifying a typical regression model for roundabout capacity estimation⁹. SIDRA is a well-known gap-acceptance model that predicts the

approach capacity at a roundabout. This model determines the number of times that gaps are larger than the minimum headway as well as the number of vehicles entering the circular flows based on the follow-up headway⁵.

The Highway Capacity Manual (HCM)¹⁰ contains a stochastic model that can integrate the statistical model and the analytical model. Besides a regression model and a gap-acceptance model, microscopic simulation can also predict roundabout performance. A core algorithm behind the microscopic simulation is based on the car-following theory and lane-changing logic. Some of the existing microscopic traffic simulation models include SimTraffic, VISSIM, AIMSUN, CUBE Dynasim, and others. In this review, VISSIM and SimTraffic were compared in terms of their operational measurement.

2 Past Work

Different studies have investigated different simulation packages, especially for roundabouts. Gallelli and Vaiana⁸ tested three separate scenarios; width of the splitter island, external roundabout radius, and width of the circulatory roadway by comparing approach delays from VISSIM. They concluded that the microsimulation results were greatly influenced by geometric variables. Al-Ghandour and Rasdorf¹¹ also used VISSIM to identify the relationship between average delay and circulating conflict volumes in a roundabout and a slip lane volume and found that they were related exponentially up to saturation point. Deshpande and Eadavalli¹², evaluated a single lane roundabout based on delay and queue length by using four traffic simulations packages, namely; SIDRA, RODEL, VISSIM, and SimTraffic. They insisted that most models including HCM 2010 were not able to mimic well the effects of imbalance in approach volumes.

On the other hand, research on multi-lane roundabouts has been conducted by many researchers. Chen and Lee⁹ compared three simulation packages including VISSIM, RODEL, and SIDRA with NCHRP Report 572 and concluded that all three simulation packages overestimated capacities and SIDRA and VISSIM underestimated delays and queue lengths while RODEL overestimated compared to NCHRP Report 572. Later Yin and Qiu¹³ did a direct comparison between VISSIM and SIDRA in delay and queue length on two-lane roundabouts. They concluded that the two simulations predicted similar delays at medium to high traffic flow and at all left turn proportion levels although VISSIM predicted longer queue length than those by SIDRA. Bared and Afshar¹⁴ tested VISSIM, SIDRA, Tanner Wu, and new NVHRP models for multi-lane roundabouts at capacity. Unlike other studies, they concluded that simulation results were compatible with field data collected in the United States by the NCHRP Report 572. Another study conducted by Ambadipudi¹⁵ revealed that VISSIM and SIDRA generated approximately 6 times and 2.5 times longer delay, respectively, on the southern approach and about 10 times and 5 times longer maximum queue length, respectively, on the eastern approach than RODEL. Peterson et al.¹⁶ compared VISSIM and RODEL at capacity on single and dual lane roundabouts finding the capacity from VISSIM were consistently lower than from RODEL. In the early comparison study conducted by Stanek and Milam⁷, it was concluded that macroscopic simulations such as FHWA, RODEL and SIDRA can be used for unsaturated conditions whereas microsimulation such as Paramics and VISSIM needs to be used for over-saturated conditions or unusual road geometry features. A summary of past studies is shown in Table 1.

Table 1. Past work summary

Author	Package	Calibration	Subject	Measurement	Finding
Gallelli and Vaiana ⁸	VISSIM	From literature Vaiana and Gallelli ¹⁷	Single-lane roundabouts	Delay	The stop-line delay shows a strong dependence on the value of the assumed time gap; The dependence of the stop-line delay from the time gap is even more marked for high traffic flows (of course); The approach speed seems to show no particular influences on stop-line delay for fixed traffic flow; The micro-simulator results are sensitive to geometric variables of each scenario.
Chen and Lee ⁹	VISSIM, RODEL, SIDRA	Field data	Multi-lane roundabouts	Queue length and delay	All three software packages overestimated capacities. SIDRA and VISSIM underestimated delays and queue lengths. RODEL overestimated delays and queue lengths at most of the entrances.
Yin and Qiu ¹³	VISSIM, SIDRA	From literature ⁵ ; Brilon ¹⁸ ; Mensah, Eshragh, and Faghri ¹⁹	Two-lane roundabouts	Queue length and delay	There is no significant difference between the delays predicted by VISSIM simulation and SIDRA at medium to high traffic flow rates and at all left turn proportion levels. The 95% queue length predicted by VISSIM is longer than that predicted by SIDRA.
Al-Ghandoor and Rasdorf ¹¹	VISSIM	Default	Single-lane roundabouts	Delay	Average delay and circulating conflict volumes in a roundabout with a slip lane are related exponentially to slip lane volumes up to a saturation point.
Deshpande and Eadavalli ¹²	SIDRA, RODEL, VISSIM, SimTraffic, HCM 2010	Field data	Single-lane roundabouts	Queue length and delay	Most models (including HCM 2010 Method) for analyzing roundabout performance are not sensitive to the effects of imbalance in approach volumes. However, the latest versions of SIDRA and VISSIM software seem to account for the effect of one approach volume dominating other approaches.

Bared and Afshar ¹⁴	VISSIM, SIDRA, Tanner Wu, new NCHRP models	Based on field experience and observing the simulation animation	2-3-lane roundabouts	Capacity	Simulation results from this research are compatible with field data in the United States from NCHRP Report 572
Ambadi p-udi ¹⁵	VISSIM, RODEL, SIDRA	Observing the simulation animation	Multi-lane roundabouts	Delay, queue length, v/c	RODEL reported lower delays and queue lengths for all the approaches. Delay results from VISSIM and SIDRA were more or less comparable for the three approaches. However, the south approach in VISSIM showed much higher delay than RODEL or SIDRA
Peterson et al. ¹⁶	VISSIM, RODEL	Default for RODEL; NCHRP 572 report, FHWA Roundabout Guide, and AASHTO for VISSIM	Single and dual lane roundabouts	Capacity, delay	The capacity estimates from VISSIM were consistently lower than the estimates from RODEL.
Stanek and Milam ⁷	RODEL, SIDRA, VISSIM, Paramics	N/A	Multi-lane roundabouts	Delay, LOS	Macroscopic methods (FHWA, RODEL, and SIDRA) were used to analyze high-capacity roundabouts only for unsaturated conditions or for isolated locations with standard geometry. Microscopic methods (Paramics and VISSIM) should be used when over-saturated conditions are present in the study area, or when unique roadway geometry features are present.

3 Model Calibration

3.1 Overview

Calibration is important in micro-traffic simulation because it reproduces the local driving environment that is influenced by many factors such as the relationship between two vehicles, infrastructure, traffic operations, and geometry of the network. The calibration process is carried out by adjusting a combination of coefficient values of parameters in the simulation.

In developing a VISSIM model, different key features need to be carefully considered including coding a proper routing decision and routes, placing priority rules correctly, and defining minimum headway and minimum gap time.

3.2 Routing Decision and Routes

Many drivers often face difficulty in driving in multi-lane roundabouts. The basic rule recommended is that drivers need to consider a roundabout as a normal intersection. In other words, if a driver wants to turn left, he/she needs to approach in the left-most lane and keep the lane on the circular road until he/she exits the roundabout assuming left-hand traffic.

On the left in Fig. 1 is a normal roundabout modeling in VISSIM that allows vehicles, approaching from any lanes, to make left turns and to change the lane in any given chance. In the other hand, on the right in the picture, vehicles make a decision earlier before approaching the roundabout and proceed driving by linking between an approaching link and a circular link with three separate connectors instead of one connector that has three lanes.

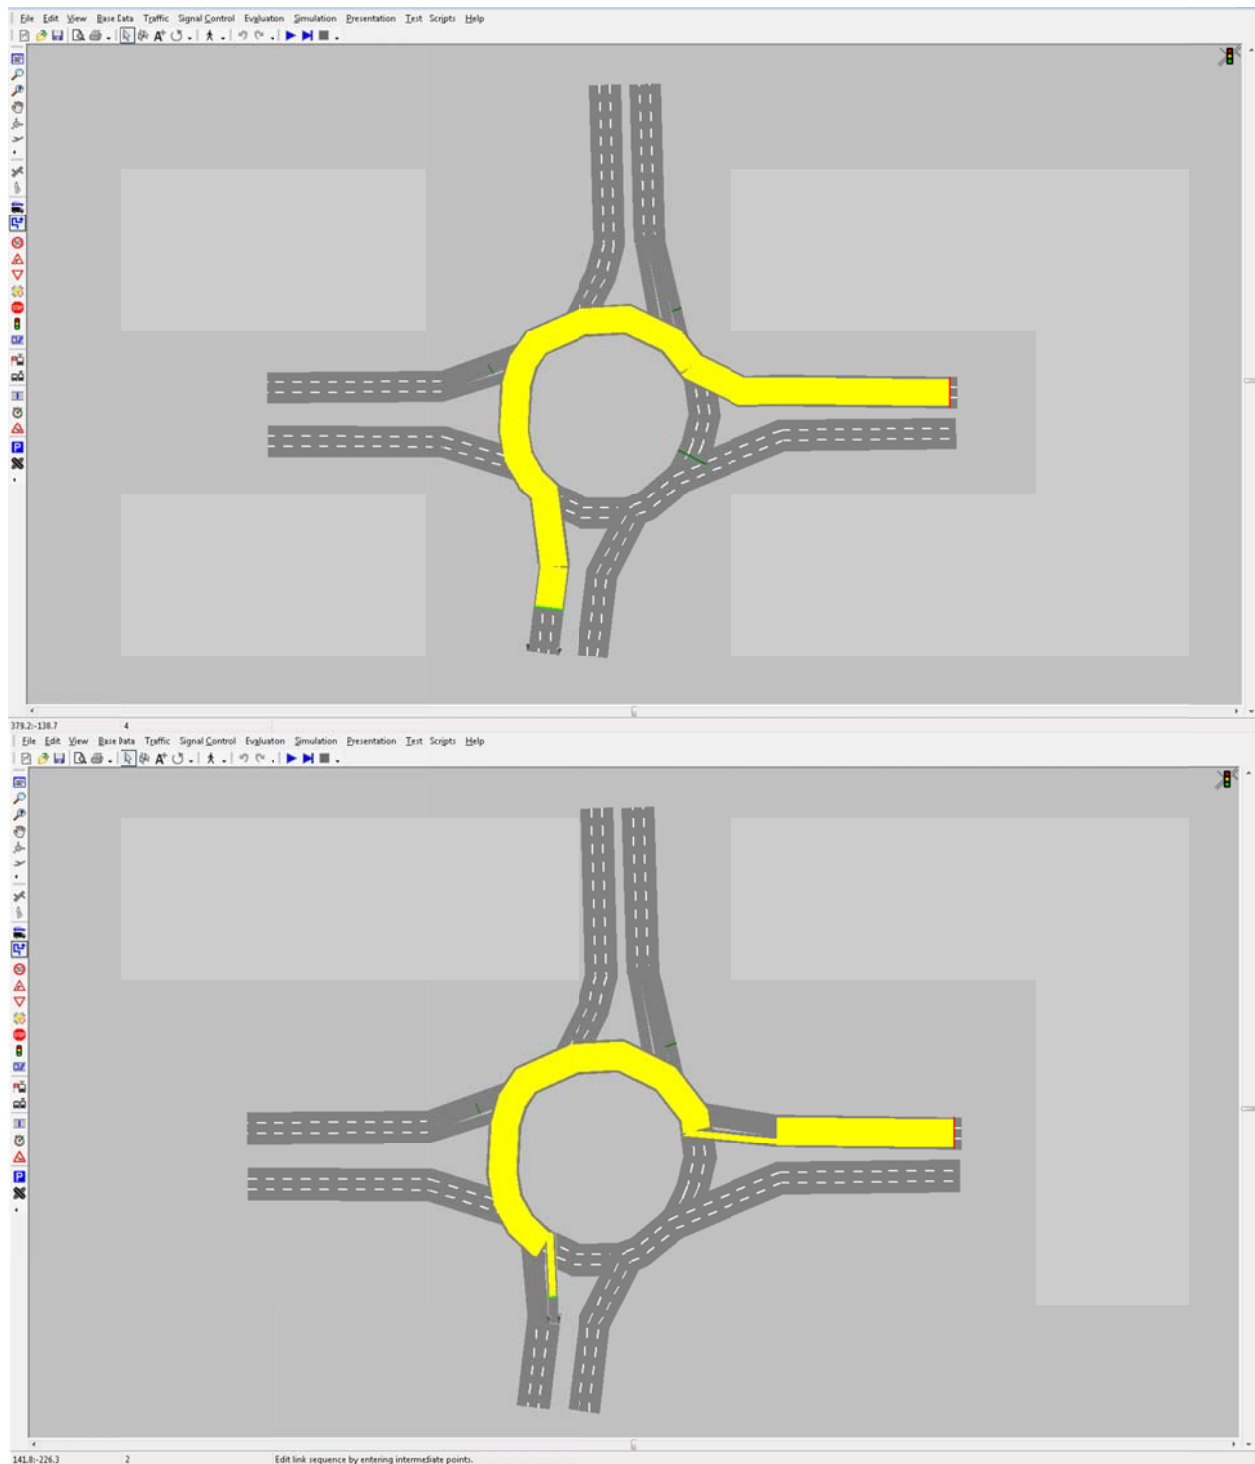


Figure 1. Default versus enhanced routes

3.3 Priority Rules with Minimum Headway and Gap Time

Priority rules in VISSIM normally are used to model non-signalized intersections. This technique can apply to roundabout conflict modeling as well. Two important factors are considered in modeling roundabouts including minimum headway and gap time. They are taken into account to decide if vehicles proceed or stop. The minimum headway is defined as the length of the conflict area. Vehicles can proceed unless the current headway is less than the minimum headway that is already set by users. The gap time varies based on the distance between the vehicle in the major flow and the start of the conflict area and the speed of the vehicle. These two conditions need to be satisfied for the vehicle to proceed. The multi-lane roundabout has many conflict points that depend on the number of lanes. Therefore, priority rules are carefully modeled with the minimum headway and gap time.

In the calibration process, different SimTraffic parameters such as travel speed, turning speed, headway factor, and lane change distance were adjusted until found to be within acceptable ranges²⁰.

3.4 Data Collection

A corridor that has four roundabouts and one signalized intersection with three lanes in each direction was selected. Travel time between the segments and maximum queue length from multiple different approaches at the intersections were selected as measures of performance. Two vehicles equipped with GPS were used in each direction to record locations and times. Based on the relationship between time and space, travel times between the roundabouts and the intersection were compared from one to another. Data collection was performed from 6:00 AM to 9:00 AM, 11:00 AM to 2:00 PM and 5:00 PM to 8:00 PM on a regular weekday in May 2013.

Ten simulation runs with random seed numbers were performed in order to ensure a reliable average travel time due to simulation's stochastic characteristics.

Values for the minimum headway and the gap time were input into VISSIM and the results for travel time were extracted. The default value for the minimum headway (length of the conflict area) and the minimum gap time was 5 meters and 3.0 seconds, respectively. The minimum headway increased incrementally by 1 meter from 4 meters to 6 meters and the gap time in increments of 0.1 seconds from 2.0 seconds to 3.0 seconds. These ranges are supported by other studies (13, 20).

In the case of SimTraffic, three values were chosen for each selected parameter. A combination of the values ($3*3*3*3*3*3$) was used to match with observed data. Travel speeds were 56, 72, and 88 km/h, left turning speeds were 19, 24, and 29 km/h, right turning speeds were 11, 14, and 18 km/h, the headway factor were 0.9, 1.0, and 1.1, the mandatory lane change distance were 160, 400, and 640 m, and the positioning distances were 240, 600, and 960 m. Once the travel time is close to the data collected, the process is finished. The parameter values obtained from this case study were used to carry out the analysis.

4 Analysis

4.1 Experimental Design

This analysis was carried out by loading a wide range of traffic flow rates with different turning proportions on a two-lane and a three-lane roundabout. The traffic flow included five levels of traffic flow rates 1,000, 2,000, 3,000, 4,000, and 5,000 veh/h, four levels of left turn proportion (LT proportion), 10%, 20%, 30%, 40%, and three levels of heavy vehicles proportions in the traffic flow, 0%, 10%, and 20%. Fixed right turn (RT) percentage of 20%, lane width of

3.65 meters, speed limit of 80 km/h, and 21 meters inside radius were used on all approaches. These values resulted in 240 combinations of scenarios (60 scenarios on two types of roundabouts for each package).

Due to the stochastic nature of the simulation, the output of the simulation will vary from different runs because many parameters used in each simulation run will be generated according to specified distributions. Ten runs with randomly selected seed numbers were performed, and the average values were used in the analysis.

4.2 Average Delay

A direct comparison of results between SimTraffic and VISSIM in terms of traffic flow rate was performed. Five types of traffic flow including 1,000, 2,000, 3,000, 4,000, and 5,000 veh/h and corresponding average delays for both packages are displayed. When traffic flow was less than 4,000 veh/h, average delays remained steady with a small amount of variation. This tendency changed significantly once traffic flow reached 4,000 veh/h. Results from both packages showed that the maximum of average delay was above 150 seconds with a range between 20 seconds and 210 seconds. When traffic flow was above 4,000 veh/h, higher average delays were expected from both but VISSIM provided a smaller range of variation, between 100 seconds and 290 seconds whereas SimTraffic ranged from 40 seconds to 310 seconds.

Since average delays showed a relatively large difference between low traffic volumes (1,000, 2,000 and 3,000 veh/hr) and high traffic volumes (4,000 and 5,000 veh/hr), the comparisons were divided into two groups, namely low traffic and high traffic. Fig. 2 shows a direct comparison of results between SimTraffic and VISSIM in terms of a truck proportion, a proportion of left turns and the number of lanes against average delay at low and high traffic volumes. Firstly, average

delays are plotted for 0, 10%, and 20% trucks in the traffic mix. Both packages produced very similar results showing an average of nearly 10 seconds regardless of the proportion of trucks in the traffic flow at low traffic volumes. In the case of high traffic volume, the higher percentage of trucks resulted in an increased average delay. Both packages showed a very similar pattern, but the overall average delay was higher in VISSIM than in SimTraffic. Secondly, the graphs showed the average delays against the proportion of left turns. When traffic volume is low, the mean of average delay for both packages shows nearly 10 seconds although variations increase with an increasing proportion of left turns in SimTraffic. In other words, VISSIM produced a consistent variation in different proportions of left turn. With high traffic volumes, both packages showed an increase in average delays with the increase of the proportions of left turns. However, VISSIM produced a mean of nearly 100 seconds more than SimTraffic. Lastly, average delays are displayed against the number of lanes that is two or three, in roundabouts. Since traffic volume is low, the average delay for both packages remains almost the same for both two and three lanes. However, as the capacity of roundabouts increases, average delays decrease, correspondingly. However, there is a difference in the mean of about 50 seconds between the two packages.

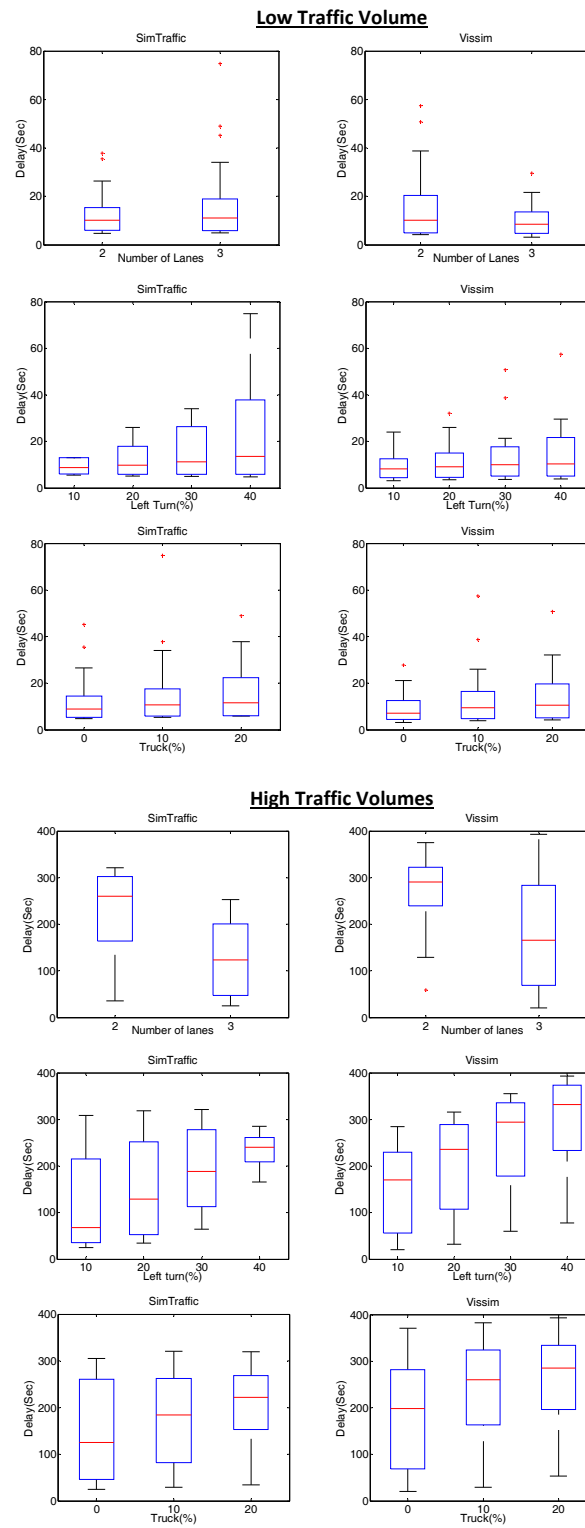


Figure 2. Average delays from SimTraffic and VISSIM against number of lanes, left turn proportion, and truck proportion at (a) low and (b) high traffic volumes

4.3 Test for Equality of Variances between Series

Levene's test is a test used to assess the equality of variances between two or more groups. If the significance is less than some critical value (e.g. 0.05), then variances are significantly different, and parametric tests cannot be used. Levene's test is often used before a comparison of means. When Levene's test shows significance, ANOVA (Analysis of variance) or t-test can follow to assess the similarity of groups.

Levene's test was used to test whether or not the population (A set of delay) variances are likely to be equal across the two groups (SimTraffic and VISSIM) under a threshold of 0.05 for significance. A p-value that is larger than 0.05 fails to reject the null hypothesis, while a p-value that is equal to or smaller than 0.05 rejects the null hypothesis and accepts the alternative hypothesis. It was found that $p = .001$, which means that the null hypothesis was rejected.

F-test, Siegel-Tukey and Bartlett tests were also used to support the result of Levene's test. The absolute values of the statistical tests (F-test, Siegel-Tukey, Bartlett) are greater than the critical value and p-values (0.015) are less than 5%. Therefore, the null hypothesis was rejected. The results conclude that the two population variances are different at the 0.05 significance level. Finally, the two series have different variability around the mean.

4.4 Test for Equality of Means between Series

A measure of central tendency is used to describe a set of data by identifying the central position within that set of data. The mean is widely used as the measure of central tendency, but the median and the mode are also used under some circumstances. The central tendency is the point around which different values in a sample or from a population are grouped, that is, the

"center" around which these values "tend" to focus. There are several measures of central tendency also known as position criteria. The best known are the mean, median or mode.

A t-test can be conducted to assess the statistical significance of the difference between the sample means (A set of delay). The null hypothesis states that the population means are equal ($H_0: \mu_1 = \mu_2$). The associated p-value is .193 (2-tailed test). Since $p = .193$, the null hypothesis cannot be rejected. This means that the mean delay for SimTraffic and VISSIM is equal, and there is not a significant difference in the mean delay for two packages. Other statistical tests such as Satterthwaite-Welch t-test, ANOVA F test, and Welch F-test also supported the null hypothesis with p-values (Probability) of 0.19, which is greater than 0.05, so the null hypothesis is accepted and it is concluded that the two population means are the same at the 0.05 significance level.

4.5 Correlation between VISSIM and SimTraffic Average Delay

The correlation between the values of average delay predicted by SimTraffic and VISSIM is given in Fig. 3. The results showed that a good correlation existed between these values with a squared correlation coefficient R^2 nearly 95%. Therefore, the output shows both types of software are strongly correlated with each other in terms of delay.

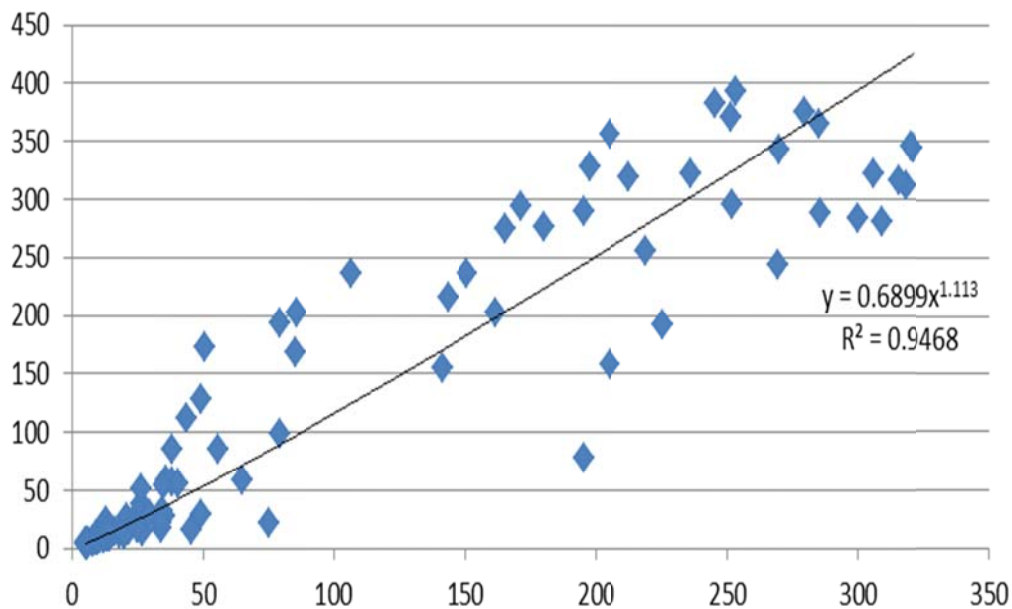


Figure 3. Correlation between SimTraffic and VISSIM

5 Summary and Conclusions

Since the inappropriate design of roundabouts in urban areas stimulates a social cost and discourages road users from driving in particular corridors, understanding the capabilities of the traffic simulation tools used in analyzing the performance of roundabouts is important in order to replicate real-world traffic situations correctly. The goal of this review was to present the differences and similarities of two widely used traffic simulation packages (SimTraffic and VISSIM) in order to help practitioners, researchers, or traffic planners to choose a traffic simulation package to analyze traffic performance for roundabouts. The two simulation tools did not show a statistically significant difference in the mean of the average delay; however, a different range of variances appeared.

It should not be overlooked that each traffic simulation package runs on the basis of an own systematic algorithm behind so that results discriminate among them. Practitioners need to decide wisely on what particular package is in accordance with specific local conditions. Like many

studies that have compared simulation tools for certain purposes in the past, this review does not conclude that one is better than another. Rather than that, this review concludes that using only one simulation tool can be risky because the results under different traffic conditions (low traffic volumes versus high traffic volumes in this review) can be different.

Although this review includes comprehensive literature reviews and provides a clear comparison between SimTraffic and VISSIM on multi-lane roundabouts, there is still more to explore regarding using traffic simulation on roundabouts. The scope of this review focuses on the performance of an isolated roundabout; however, multiple roundabouts at the network level should be analyzed in the future in order to understand traffic conditions more comprehensively. Finally, the factors considered in this review are traffic volumes, the proportion of left turning movement, and the proportion of trucks in the traffic flow. Other factors such as different types of vehicles in the traffic, gender percentages, and the average age of drivers, the size of roundabouts, and weather conditions should also be considered as part of future reviews.

References

1. Azlina, I., and M. Intan Suhana. Cube Dynasim And Aasidra Comparisons In Analyzing A Signalized Intersection. In Malaysian Universities Transportation Research Forum and Conferences, Universiti Tenaga Nasional, Putrajaya, 2010.
2. Tey, L.-S., I. Kim, and L. Ferreira. Evaluating safety at railway level crossings with microsimulation modeling. Transportation Research Record: Journal of the Transportation Research Board, Vol. 2298, No. 1, 2012, pp. 70-77.

3. Shaaban, K. S., A. E. Radwan, and P. C. E. Director. Comparison of SimTraffic and VISSIM microscopic traffic simulation tools in signalized intersections modeling. *SIMULATION SERIES*, Vol. 36, No. 4, 2004, p. 422.
4. Kinzel, C. S., and M. T. Trueblood. The Effects of Operational Parameters in the Simulation of Roundabouts. In *ITE 2004 Annual Meeting and Exhibit*, 2004.
5. Akçelik, R., and M. Besley. *SIDRA 5 user guide*. ARRB Transport Research, 1999.
6. Kiattikomol, V., and I. Urbanik. An Evaluation of Roundabout as an Alternative Intersection Control Device using VISSIM Simulation application. CD-ROM. Transportation Research Board of the National Academies, Washington, DC, 2005.
7. Stanek, D., and R. T. Milam. High-capacity roundabout intersection analysis: going around in circles. *Transportation Research E-Circular*, No. E-C083, 2005.
8. Gallelli, V., and R. Vaiana. *Evaluation of Roundabout Performances Using a Micro-Simulation Software*. 2012.
9. Chen, X., and M. S. Lee. A performance analysis of congested multi-lane roundabouts: A case study of East Dowling Road roundabouts in Anchorage, Alaska. In *90th Transportation Research Board Meeting*, Washington, DC, 2011.
10. HCM. *Highway Capacity Manual*. In, Transportation Research Board, Washington D.C., 2010.
11. Al-Ghandour, W., and S. Rasdorf. Roundabout Performance Analysis When Introducing Slip Lanes. In *1st International Conference on Access Management*, 2011.

12. Deshpande, N., and V. Eadavalli. Simulation Based Operational Performance of Roundabout with Unbalanced Traffic Volumes. In ITE Annual Meeting, Alaska, 2011.
13. Yin, D., and T. Z. Qiu. Comparison of Macroscopic and Microscopic Simulation Models in Modern Roundabout Analysis. Transportation Research Record: Journal of the Transportation Research Board, Vol. 2265, No. 1, 2011, pp. 244-252.
14. Bared, J. G., and A. M. Afshar. Using Simulation To Plan Capacity Models By Lane For Two-And Three-Lane Roundabouts. Transportation Research Record: Journal of the Transportation Research Board, Vol. 2096, No. 1, 2009, pp. 8-15.
15. Ambadipudi, R. P. Modeling High-Capacity Multilane Roundabouts. In Transportation Research Board 88th Annual Meeting, 2009.
16. Peterson, R. W., S. J. Lewis, K. Fugel, and R. Lancaster. Modeling Roundabouts: Lessons 1 Learned in Idaho. In National Roundabout Conference, 2008.
17. Vaiana, R., and V. Gallelli. The calibration of traffic microscopic simulation models: kinematical approach to the through movement on roundabouts. In Proceedings of 90th TRB Annual Meeting, Washington, DC, USA, 2011.
18. Brilon, W. Roundabouts: A state of the art in Germany. In National Roundabout Conference, Vail, Colorado, No. 16, 2005.
19. Mensah, S., S. Eshragh, and A. Faghri. A Critical Gap Analysis of Modern Roundabouts. In Transportation Research Board Annual Meeting, Washington, DC, 2010.

20. Shaaban, K., and E. Radwan. A calibration and validation procedure for microscopic simulation model: a case study of Simtraffic for arterial streets. In Proceedings of the 84rd TRB Annual Meeting, Washington, DC, 2005.

A Review of Traffic Simulation Software - Quiz

Updated: 2/21/2019

1) The need for microsimulation modelling has been considered by traffic professionals in order to _____.

- a. have an advanced understanding of an overview of traffic
- b. identify current problems
- c. suggest possible immediate solutions
- d. All of the above.

2) Simulation modelling could save users huge amounts of _____.

- a. time
- b. effort
- c. money
- d. all of the above.

3) The deterministic model evaluates performance based on _____.

- a. the relationship between traffic speed and safety.
- b. the relationship between safety and width of the road.
- c. the relationship between traffic flow and capacity.
- d. the relationship between traffic speed and type of vehicle.

4) The Highway Capacity Manual (HCM) contains a _____.

- a. regression model
- b. stochastic simulation model
- c. deterministic model
- d. logistic model

5) Some of the existing microscopic traffic simulation models include _____.

- a. SimTraffic
- b. VISSIM
- c. AIMSUN
- d. All of the above

6) The calibration process is carried out by _____.

- a. using a previous model.
- b. measuring circle diameter.
- c. measuring turning radius.
- d. adjusting a combination of coefficient values of parameters in the simulation.

7) In developing a VISSIM model, different key features need to be carefully considered including _____.

- a. placing priority rules correctly
- b. coding a proper routing decision and routes
- c. defining minimum headway and minimum gap time.
- d. All of the above

8) In the calibration process, different SimTraffic parameters such as _____ were adjusted.

- a. turning speed
- b. headway factor
- c. travel speed
- d. All of the above.

9) The two simulation tools _____.

- a. showed statistically significant difference in the mean of the average delay (VISSIM higher).
- b. showed statistically significant difference in the mean of the average delay (SimTraffic higher).
- c. did not show statistically significant difference in the mean of the average delay.
- d. did not produce any results.

10) Practitioners need to decide wisely on what particular package is in accordance with _____.

- a. easiness of use.
- b. budget.
- c. duration of project.
- d. specific local conditions.